


Part II: ns Internals

Outline

- ◆ Fundamental concept
 - Split object: C++/OTcl linkage
- ◆ Plumbing
 - Wired
 - Wireless
- ◆ Scaling

OTcl and C++: The Duality

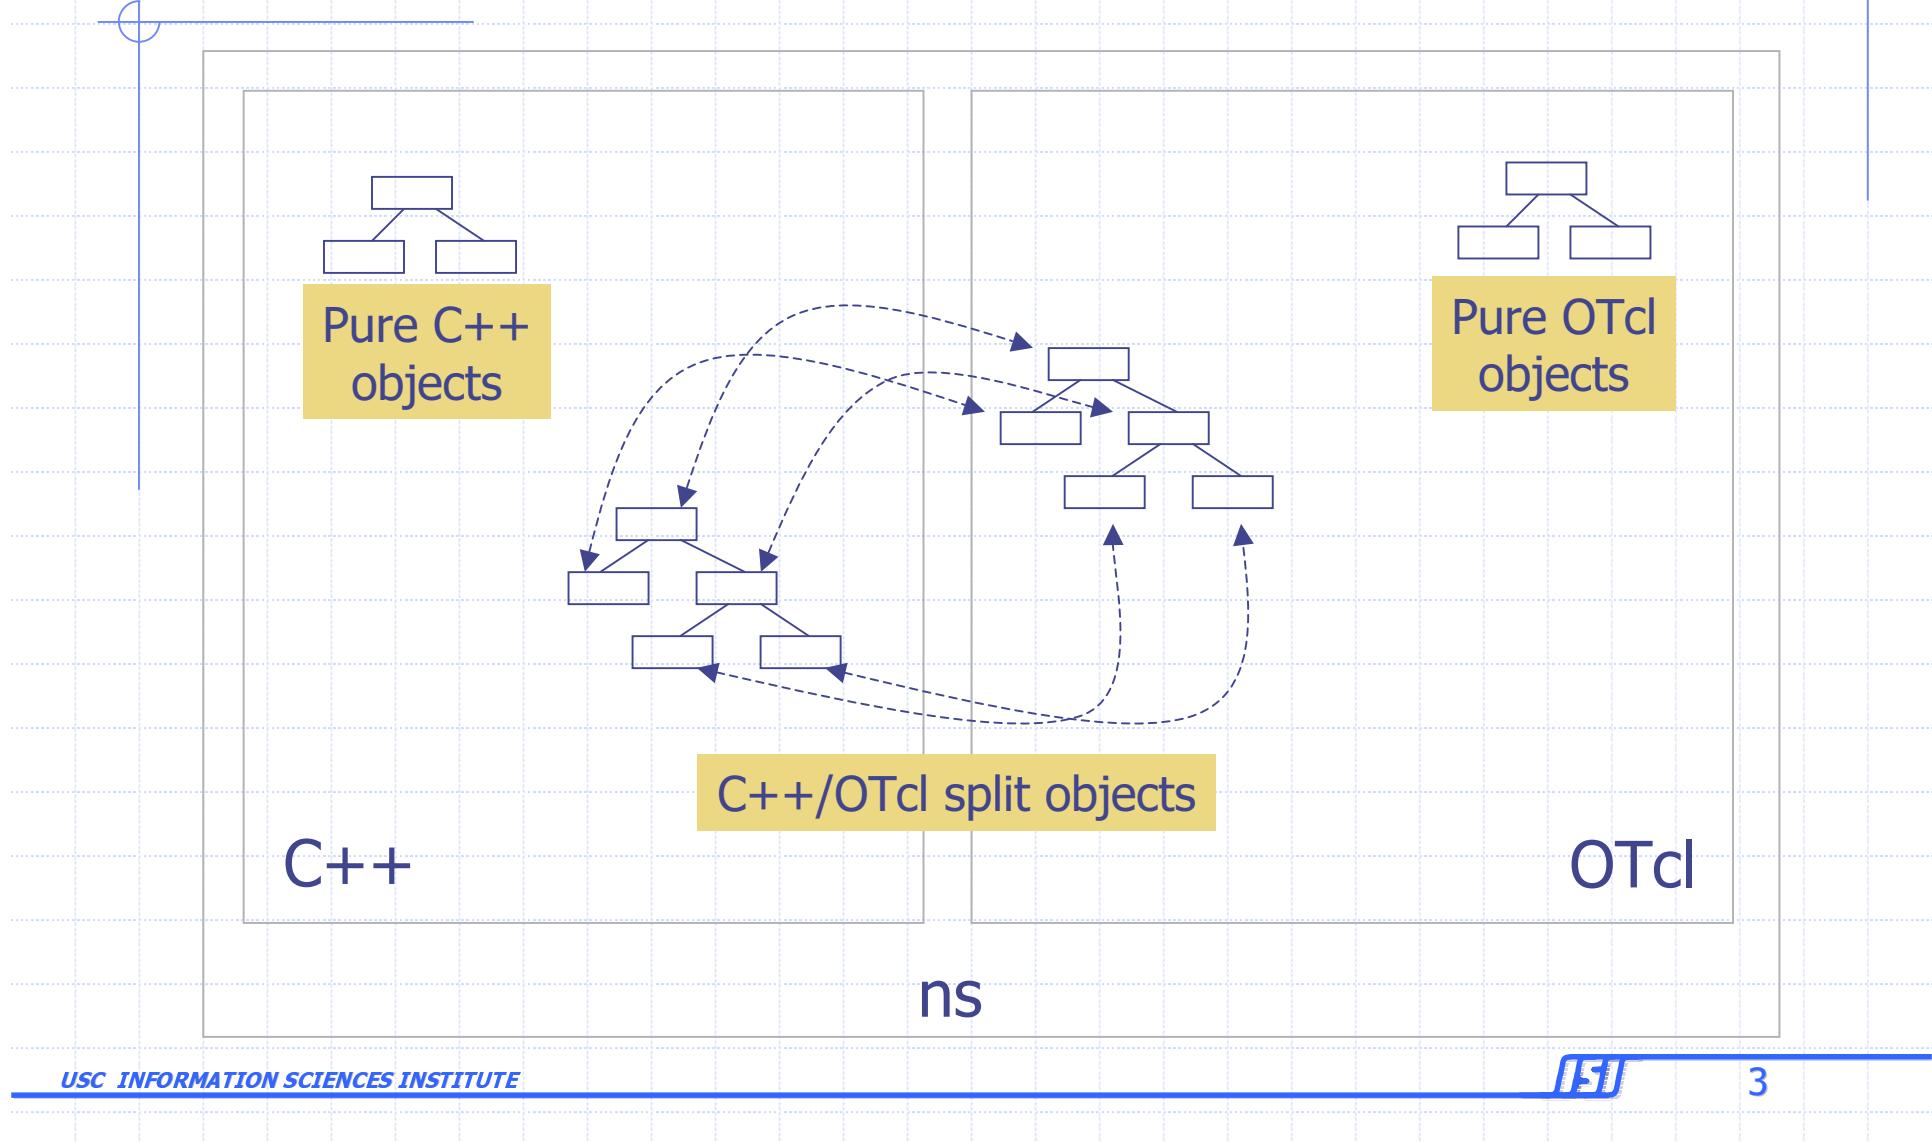

C++/OTcl Linkage

TclObject	Root of ns-2 object hierarchy bind(): link variable values between C++ and OTcl command(): link OTcl methods to C++ implementations
TclClass	Create and initialize TclObject's
Tcl	C++ methods to access Tcl interpreter
TclCommand	Standalone global commands
EmbeddedTcl	ns script initialization

TclObject


- ◆ Basic hierarchy in ns for split objects
- ◆ Mirrored in both C++ and OTcl
- ◆ Example

```
set tcp [new Agent/TCP]
```

```
$tcp set packetSize_ 1024
```

```
$tcp advanceby 5000
```

TclObject: Hierarchy and Shadowing

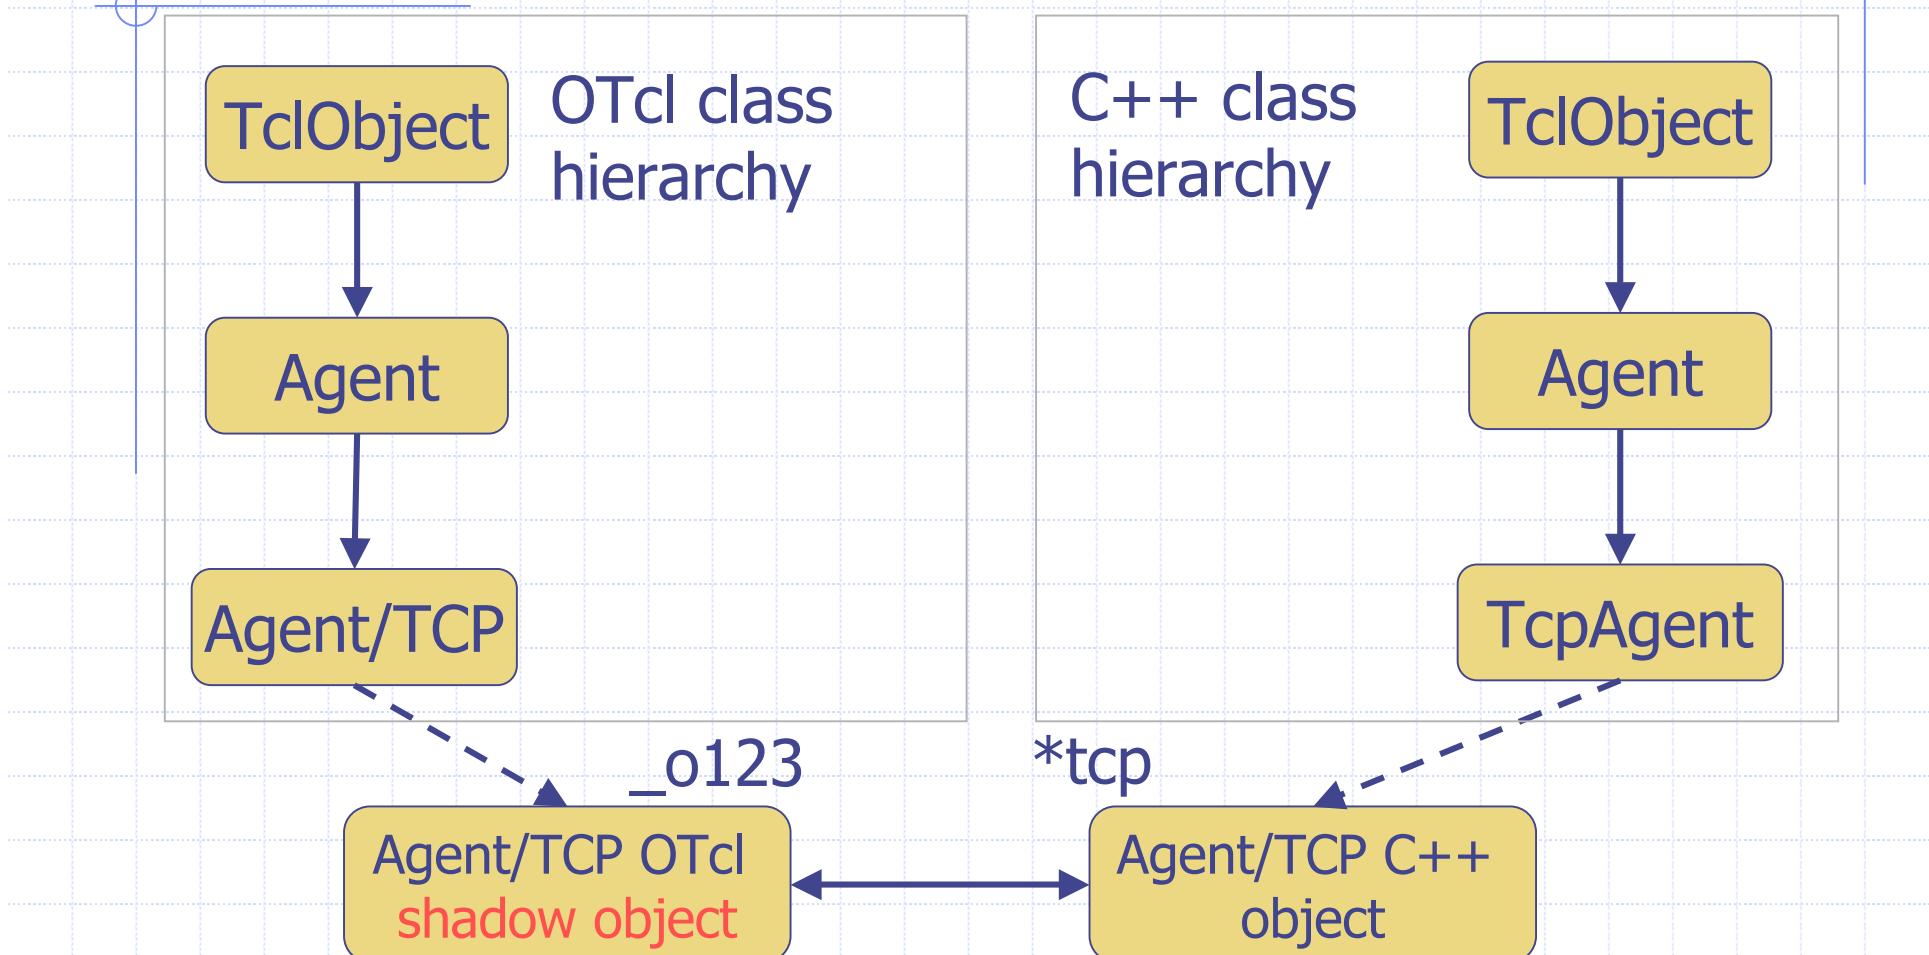

TclObject::bind()

- ◆ Link C++ member variables to OTcl object variables

- ◆ C++

```
TcpAgent ::TcpAgent() {  
    bind("window_", &wnd_);  
    ... ...  
}
```

- bind_time(), bind_bool(), bind_bw()

- ◆ OTcl

```
set tcp [new Agent/TCP]  
$tcp set window_ 200
```

Initialization of Bound Variables

- ◆ Initialization through OTcl class variables

Agent/TCP set **window_** 50

- ◆ Do all initialization of bound variables in ~ns/lib/ns-default.tcl
 - Otherwise a warning will be issued when the shadow object is created

Implementation of Bound Variables

◆ Class InstVar

- One object per bound variable – **expensive!**
- InstVarInt, InstVarReal, ...

◆ Created by TclObject::bind()

- Create instance variable in OTcl stack
- Enable trap read/write to OTcl variable using `Tcl_TraceVar()`
- Connect to C++ variable in the trap

TclObject::command()

- ◆ Implement OTcl methods in C++
- ◆ Trap point: OTcl method cmd{}
- ◆ Send all arguments after cmd{} call to
TclObject::command()

TclObject::command()


- ◆ OTcl

```
set tcp [new Agent/TCP]  
$tcp advance 10
```

- ◆ C++

```
int TcpAgent::command(int argc,  
                      const char*const* argv) {  
    if (argc == 3) {  
        if (strcmp(argv[1], "advance") == 0) {  
            int newseq = atoi(argv[2]);  
            .....  
            return(TCL_OK);  
        }  
    }  
    return (Agent::command(argc, argv));  
}
```

TclObject::command()

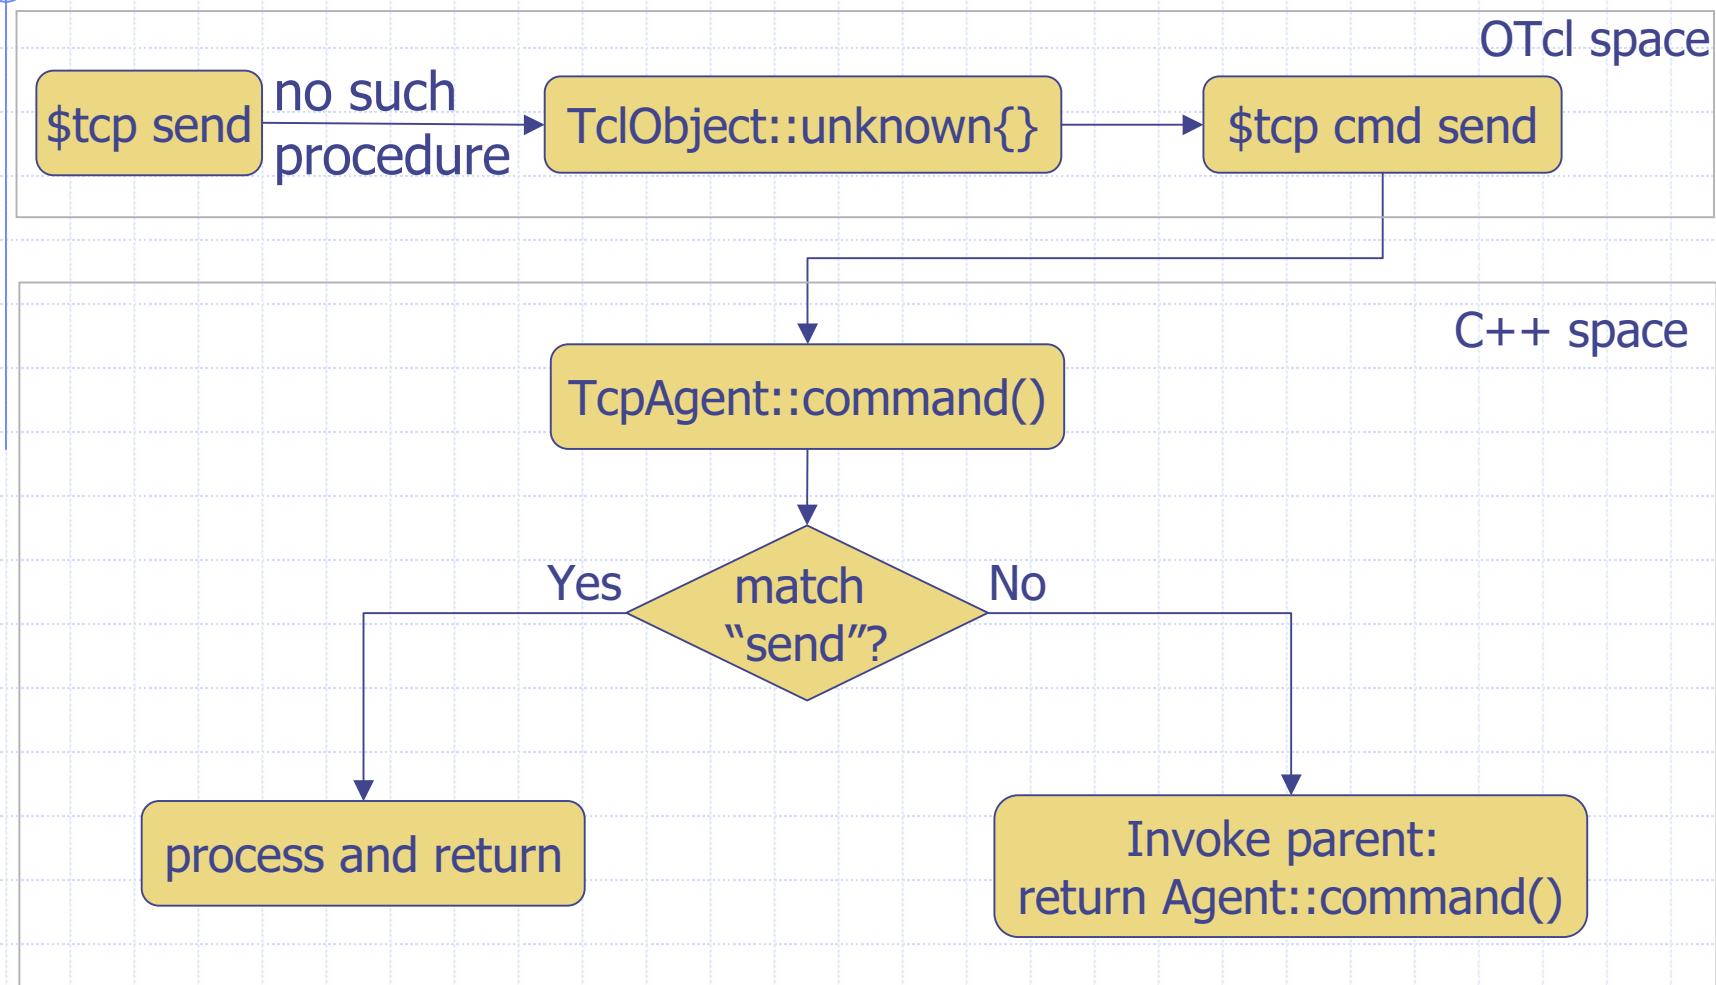

TclObject: Creation and Deletion


- ◆ Global procedures: new{}, delete{}
- ◆ Example

```
set tcp [new Agent/TCP]
```

...

```
delete $tcp
```

TclObject: Creation and Deletion

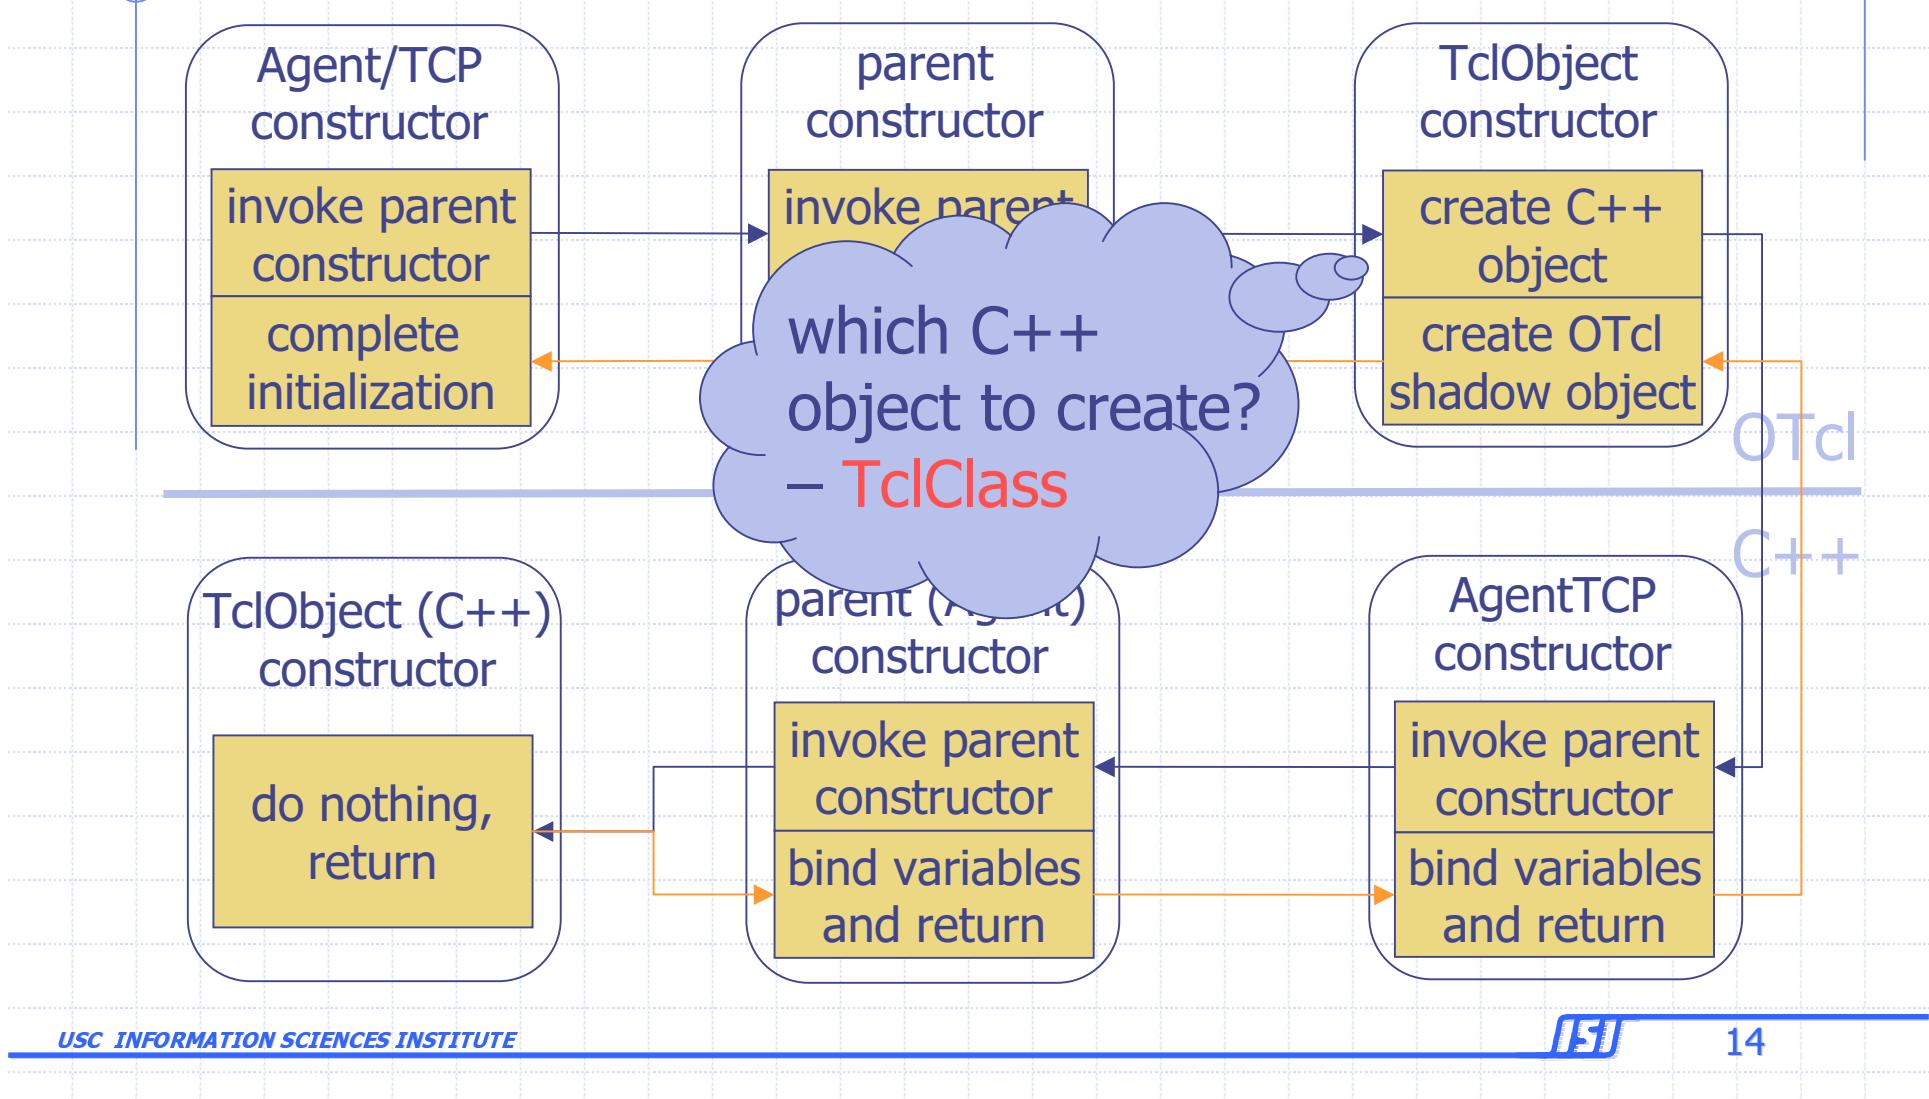

TclClass

C++

TclObject



NsObject



Agent



TcpAgent

```
Static class TcpClass : public TclClass {  
public:  
    TcpClass() : TclClass("Agent/TCP") {}  
    TclObject* create(int, const char*const*) {  
        return (new TcpAgent());  
    }  
} class_tcp;
```

Agent/TCP



TclClass: Mechanism

◆ Initialization at runtime startup

TclClass::init()

for each statically
defined TclClass

e.g.

TcpClass::bind()

SplitObject::register{}
Create and register
OTcl class Agent/TCP

Agent/TCP::create-shadow{}
→TclClass::create_shadow()

Class Tcl

- ◆ Singleton class with a handle to Tcl interpreter
- ◆ Usage
 - Invoke OTcl procedure
 - Obtain OTcl evaluation results
 - Pass a result string to OTcl
 - Return success/failure code to OTcl

Class Tcl

```
Tcl& tcl = Tcl::instance();  
if (argc == 2) {  
    if (strcmp(argv[1], "now") == 0) {  
        tcl.resultf("%g", clock());  
        return TCL_OK;  
    }  
    tcl.error("command not found");  
    return TCL_ERROR;  
} else if (argc == 3) {  
    tcl.eval(argv[2]);  
    clock_ = atof(tcl.result());  
    return TCL_OK;  
}
```

Class TclCommand

- ◆ C++ implementation of global OTcl commands

```
class RandomCommand : public TclCommand {  
public:  
    RandomCommand() : TclCommand("ns-random") {}  
    virtual int command(int argc, const char*const* argv);  
};  
  
int RandomCommand::command(int argc, const char*const* argv)  
{  
    Tcl& tcl = Tcl::instance();  
    if (argc == 1) {  
        sprintf(tcl.buffer(), "%u", Random::random());  
        tcl.result(tcl.buffer());  
    }  
}
```

EmbeddedTcl

- ◆ Pre-load OTcl scripts at ns runtime startup
 - Recursively load ~ns/tcl/lib/ns-lib.tcl:

```
source ns-autoconf.tcl
source ns-address.tcl
source ns-node.tcl
....
```
 - Load everything into a single C++ string
 - Execute this string at runtime startup
- ◆ `Tcl::init()`: load ~tclcl/tcl-object.tcl
- ◆ `Tcl_AppInit()`: load ~ns/tcl/lib/ns-lib.tcl

EmbeddedTcl

◆ How it works

- `tcl2c++`: provided by TclCL, converts tcl scripts into a C++ static character array
- `Makefile.in`:

```
tclsh8.0 bin/tcl-expand.tcl tcl/lib/ns-
lib.tcl | tcl2c++ et_ns_lib >
gen/ns_tcl.cc
```

Summary

- ◆ **TclObject**

- Unified interpreted (OTcl) and compiled (C++) class hierarchies
- Seamless access (procedure call and variable access) between OTcl and C++

- ◆ **TclClass**

- The mechanism that makes TclObject work

- ◆ **Tcl:** primitives to access Tcl interpreter


Outline

- ◆ Fundamental concept
 - Split object
- ◆ Plumbing
 - Wired world
 - Wireless world
- ◆ Scaling

ns Internals


- ◆ Discrete event scheduler
- ◆ Network topology
- ◆ Routing
- ◆ Transport
- ◆ Packet flow
- ◆ Packet format
- ◆ Application

Discrete Event Scheduler

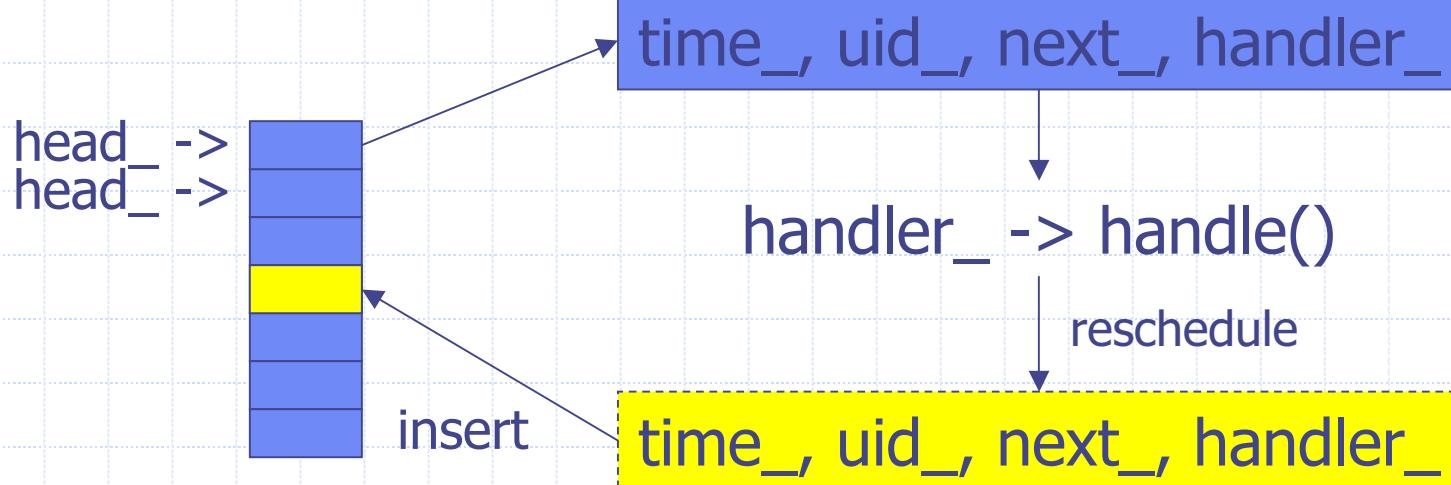


- ◆ Three types of schedulers
 - List: simple linked list, order-preserving, $O(N)$
 - Heap: $O(\log N)$
 - Calendar: hash-based, fastest, $O(1)$


Network Topology: Node

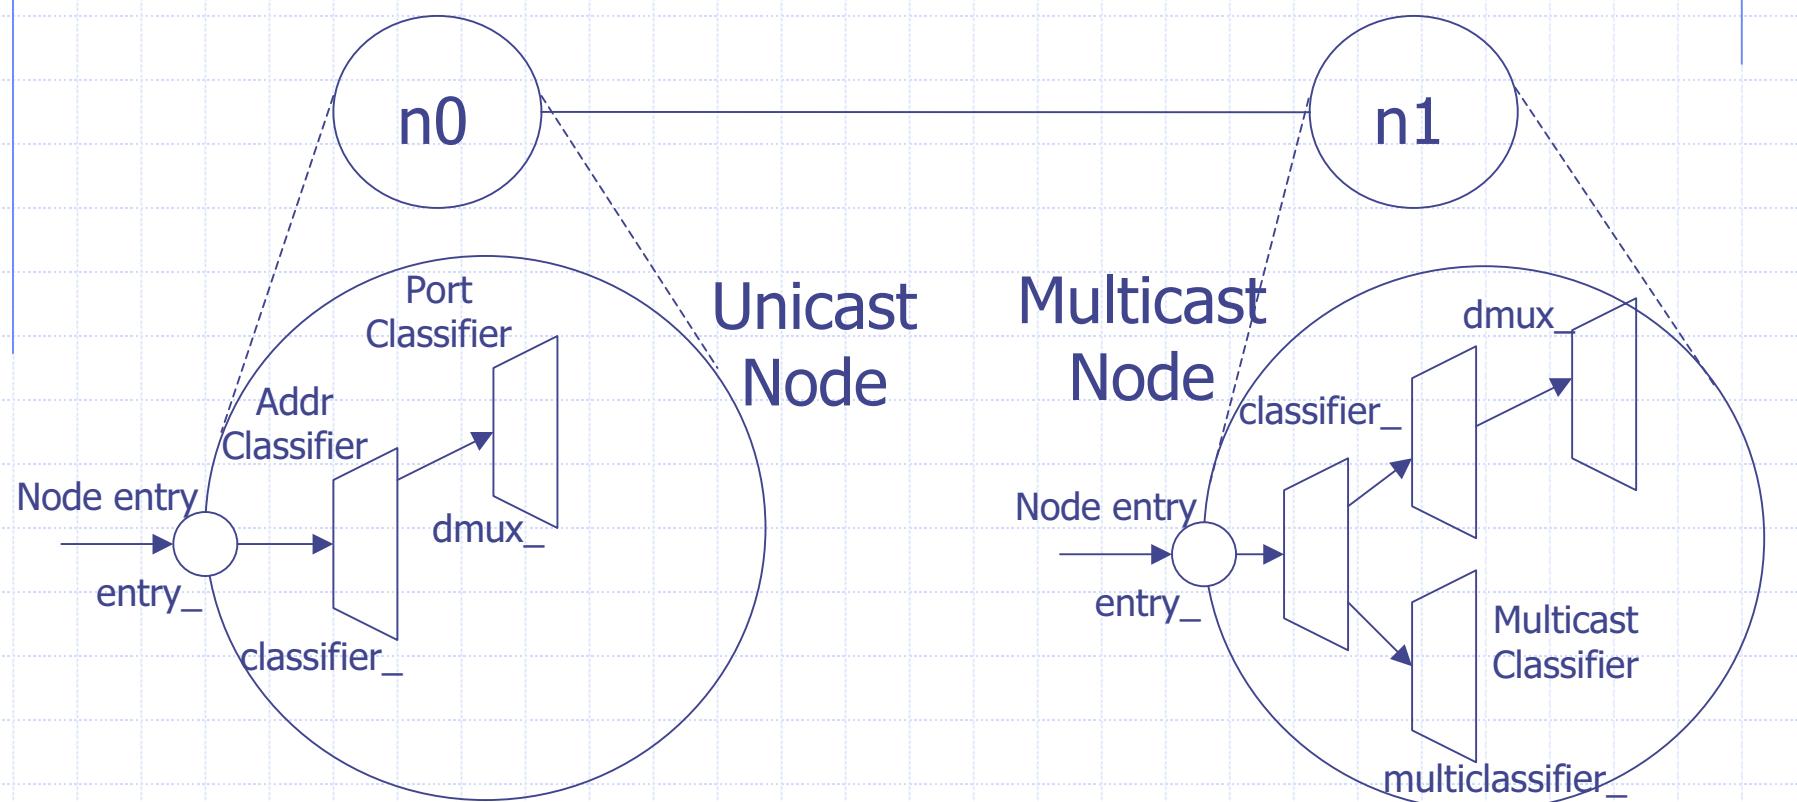


Network Topology: Link

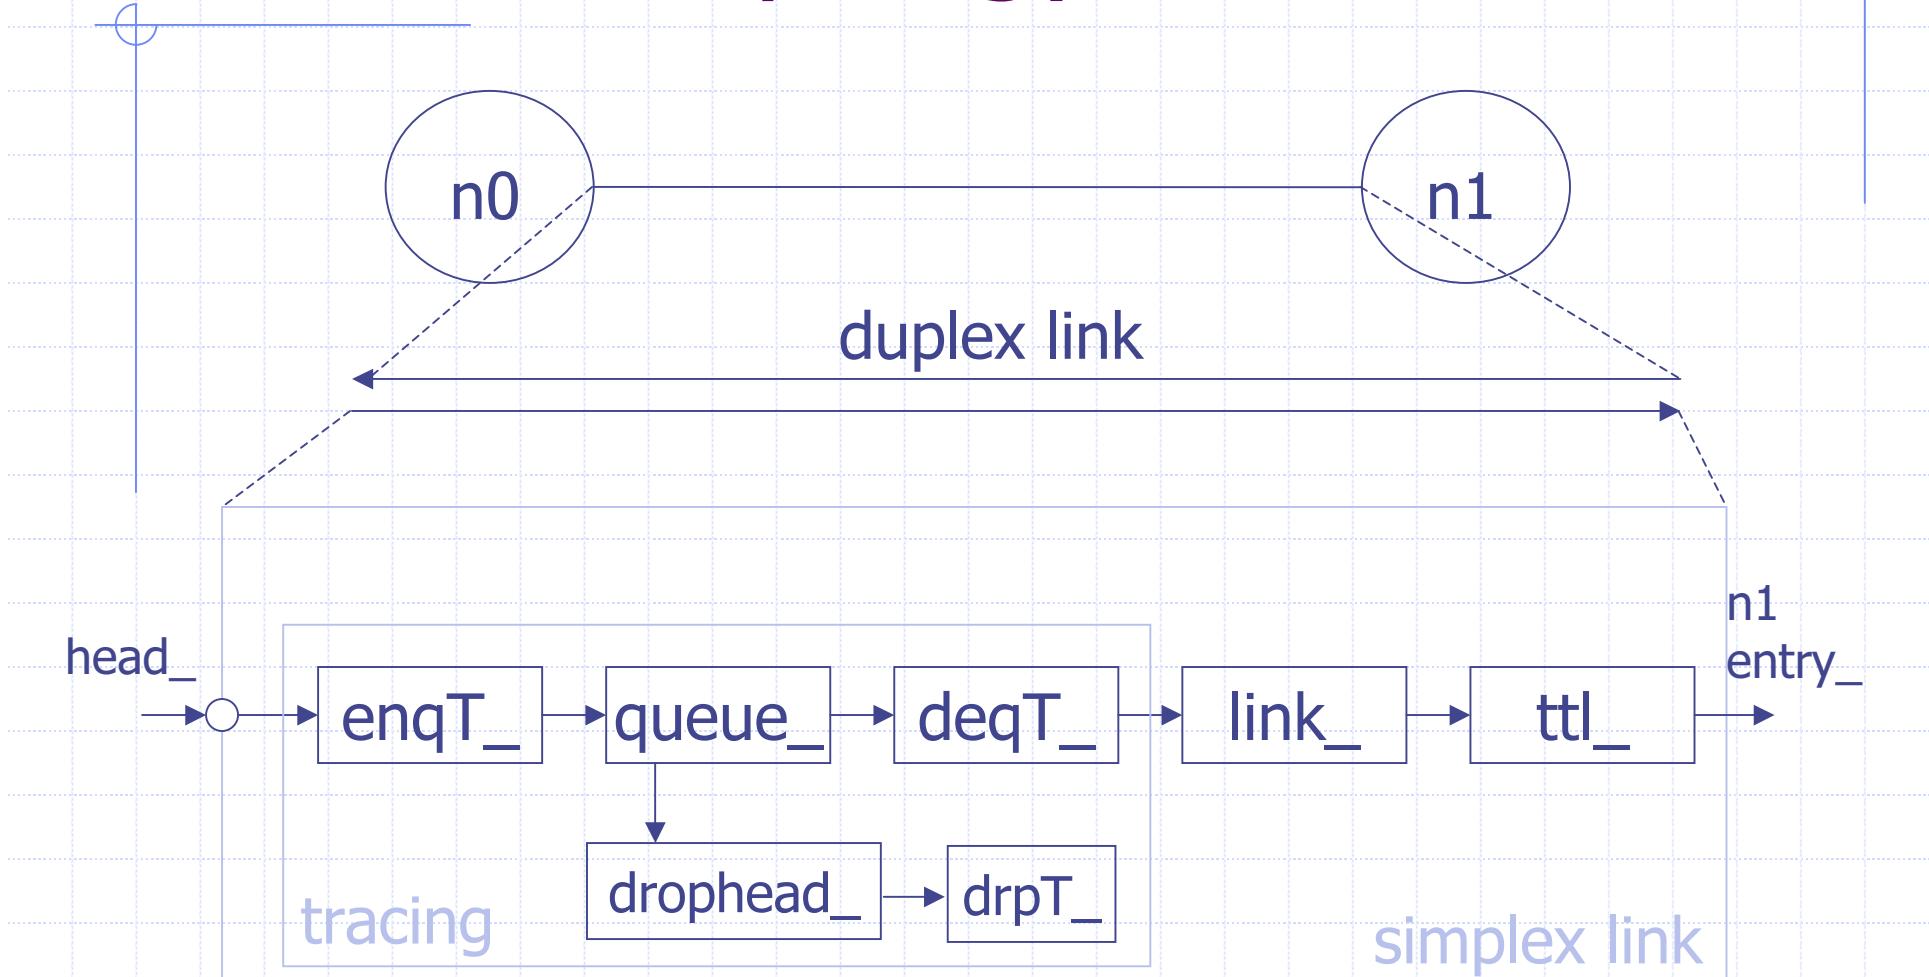


Routing

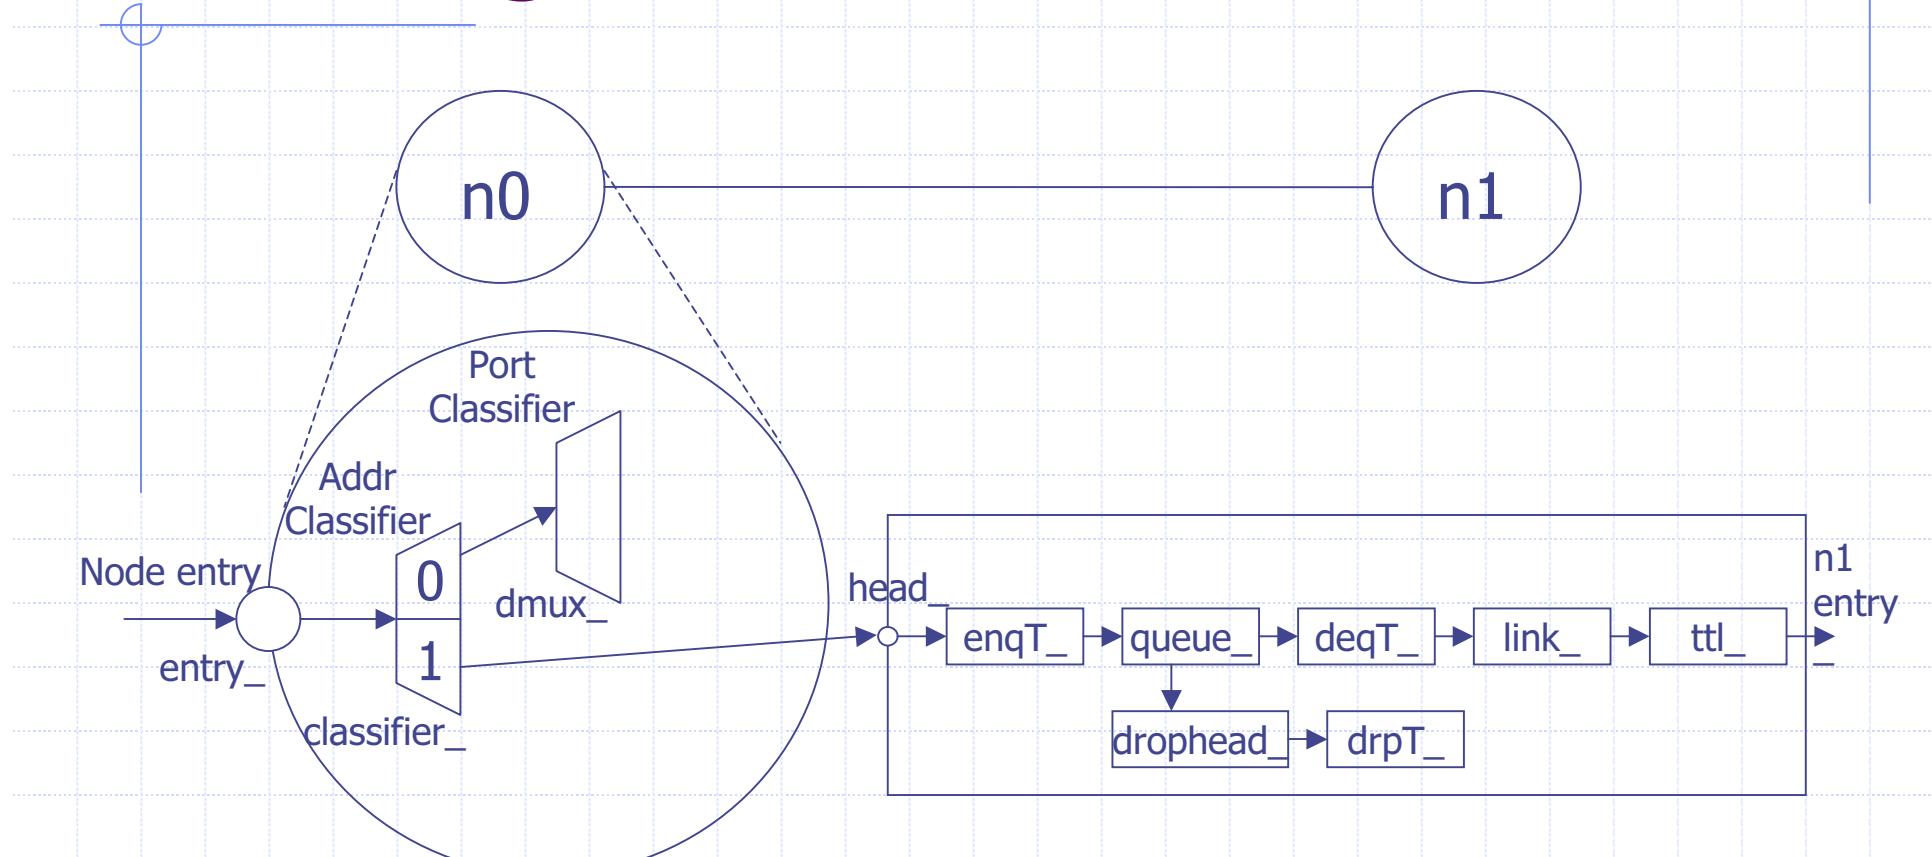


Routing (con't)

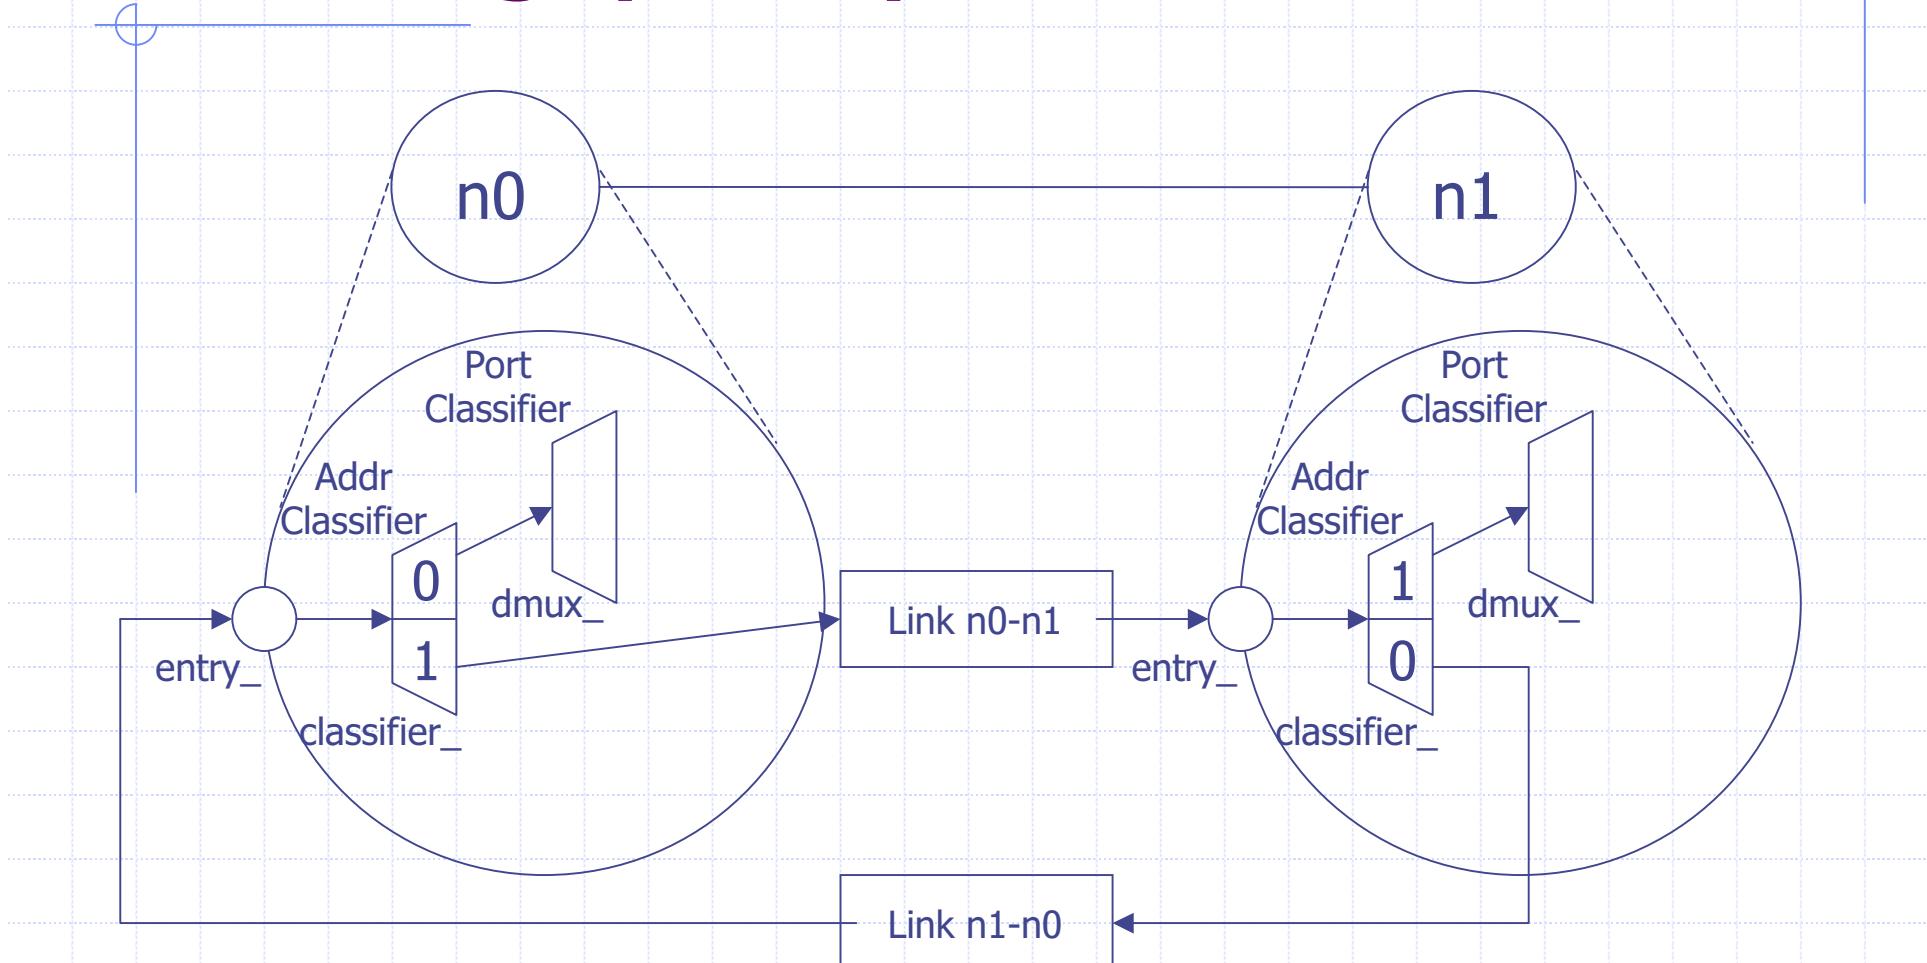


Transport

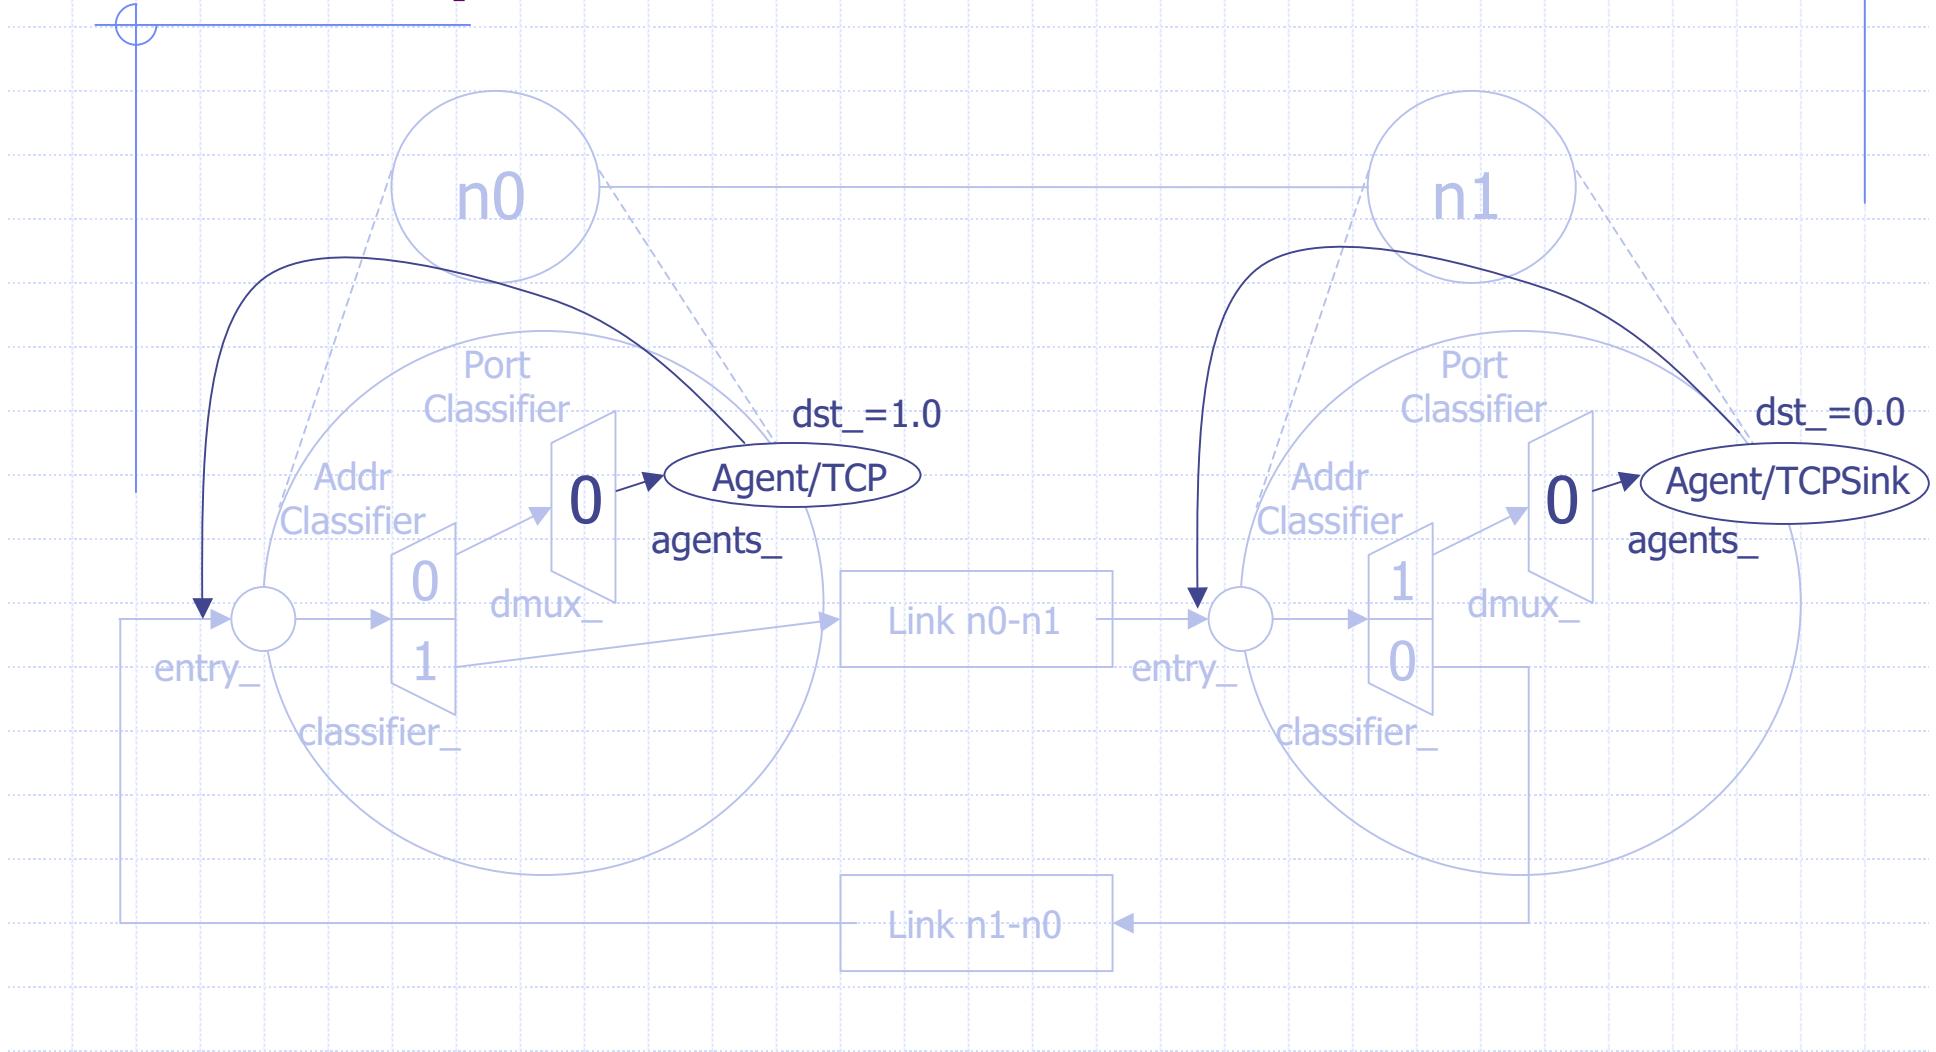


Application: Traffic Generator

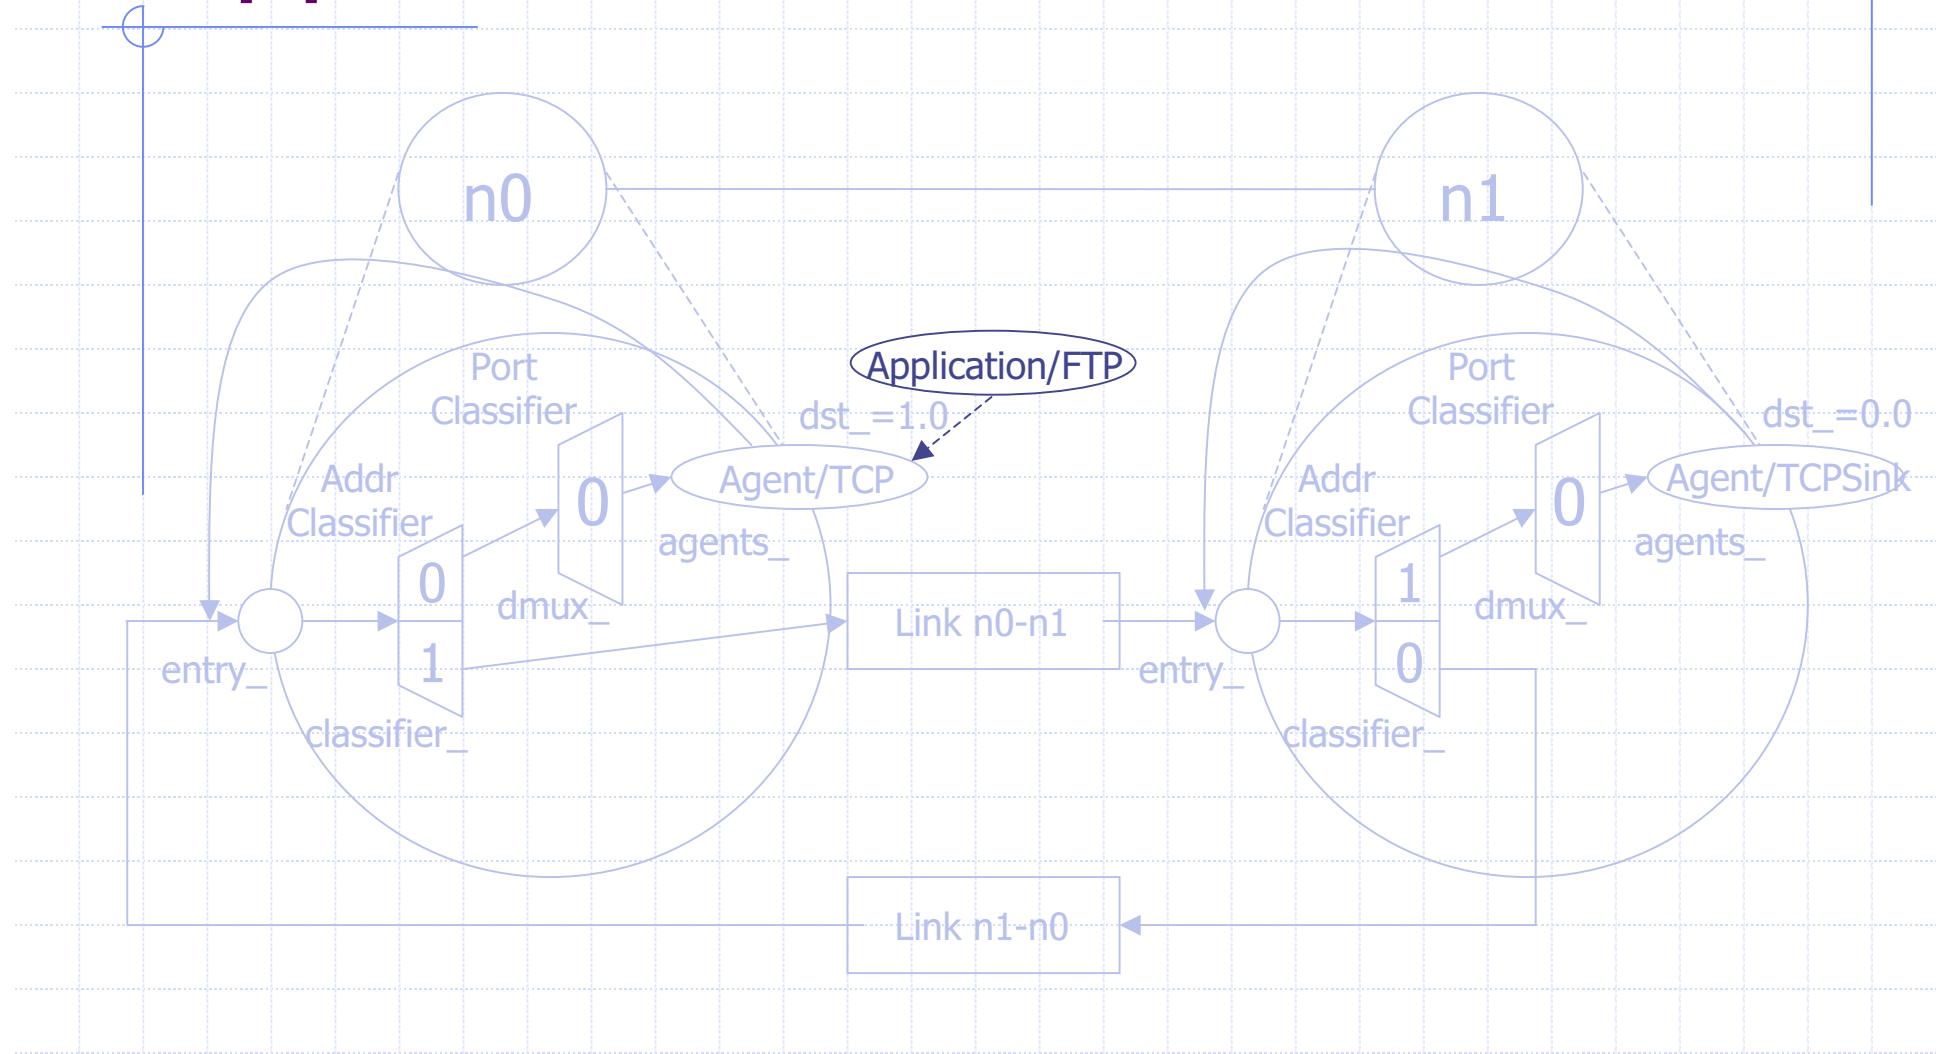

Plumbing: Packet Flow

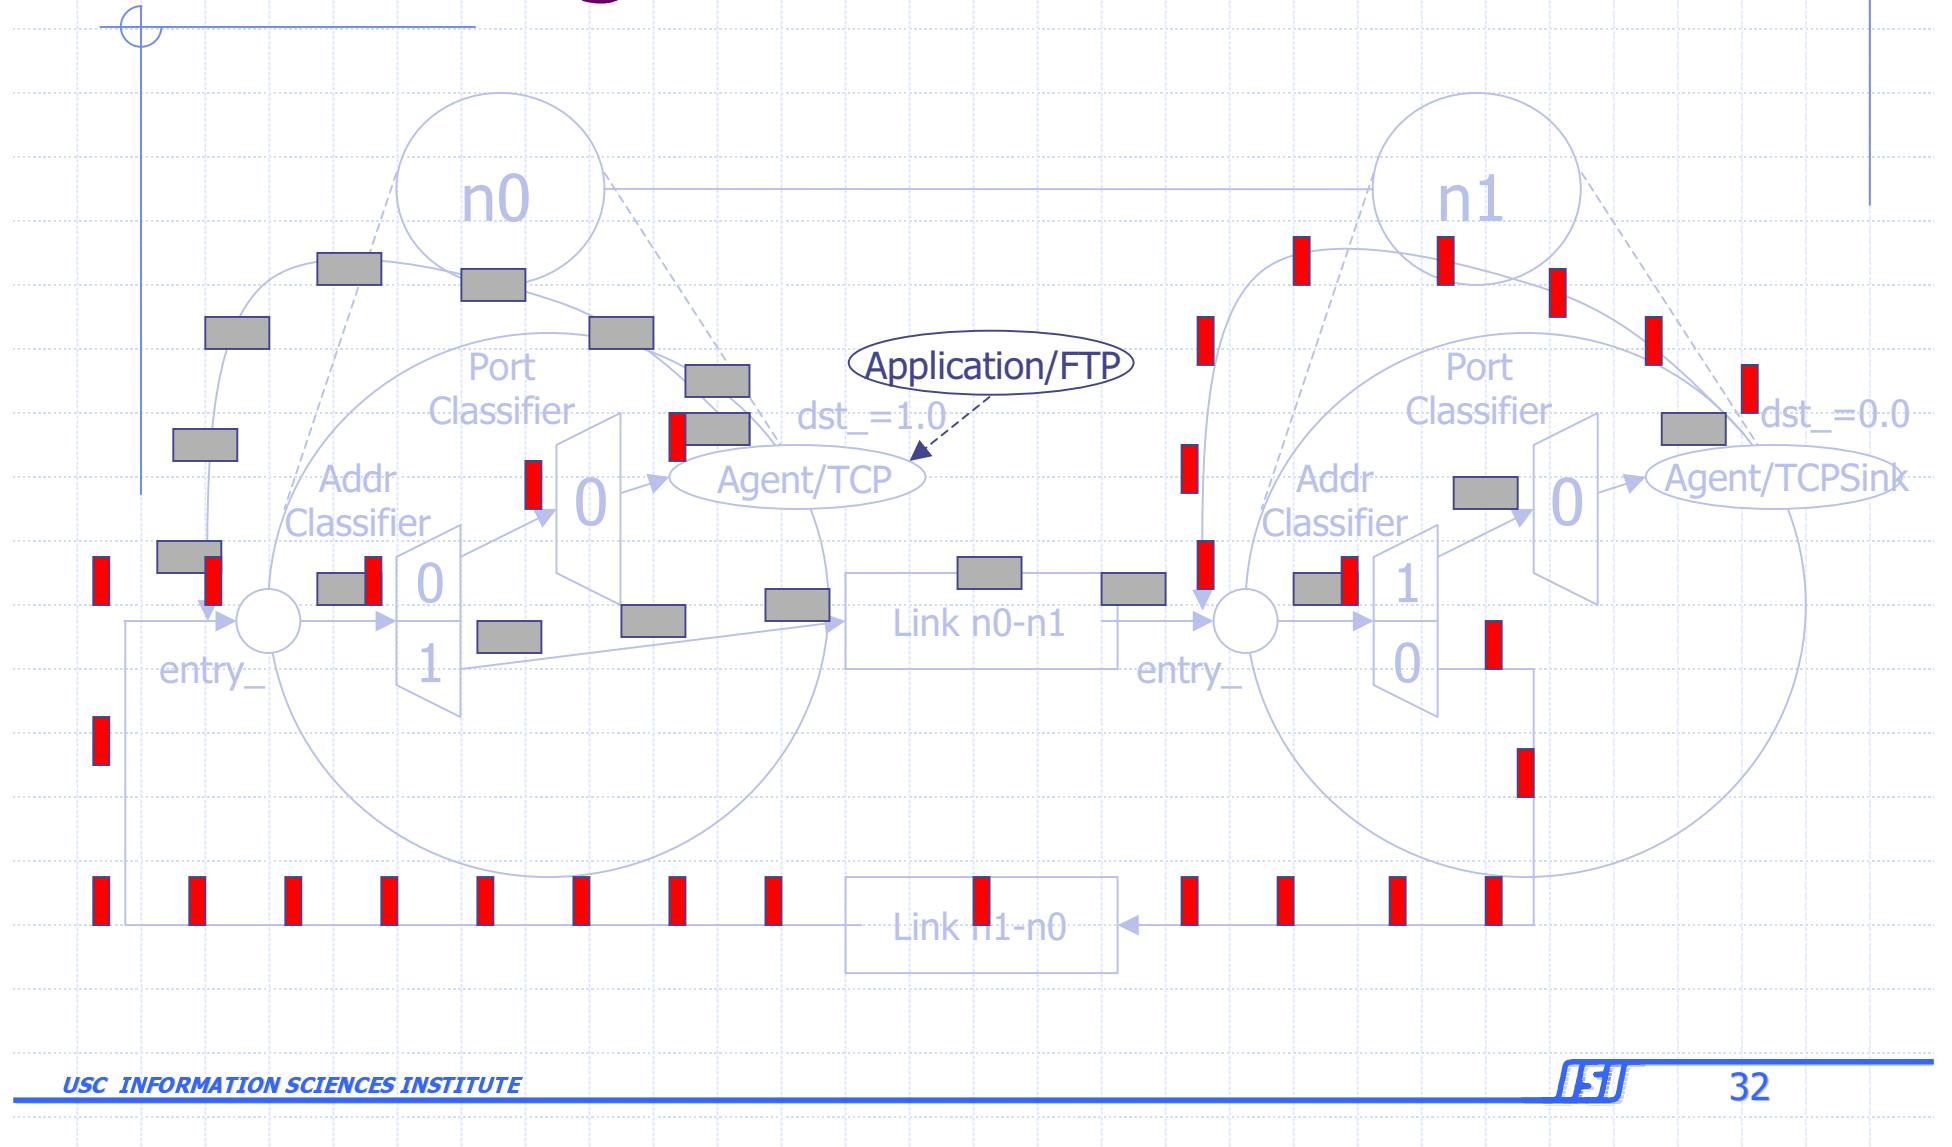

Packet Format

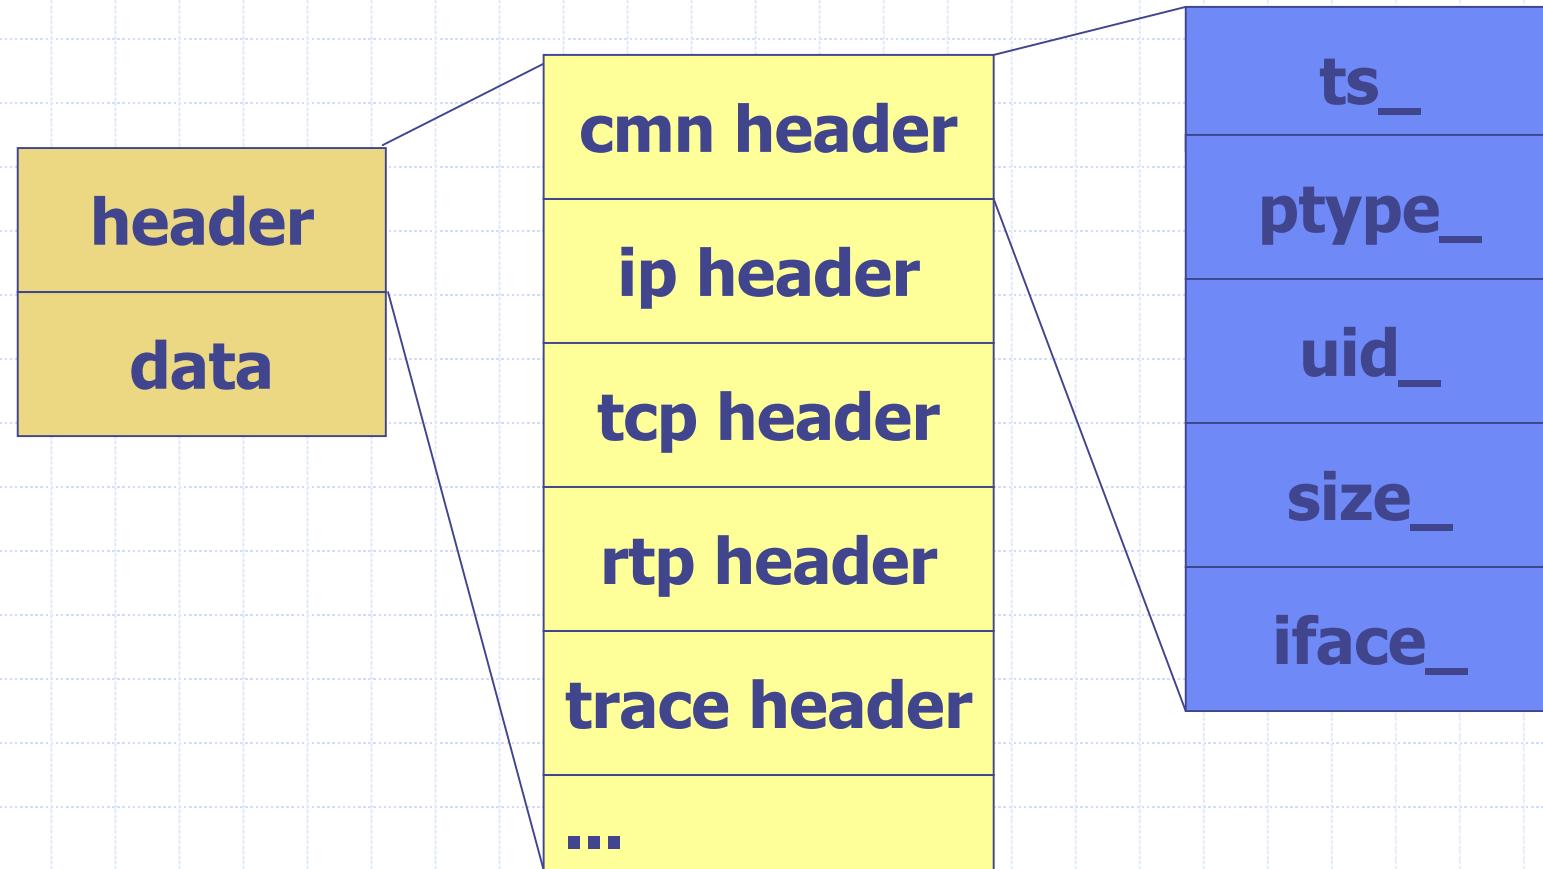


Outline

- ◆ Fundamental concept
 - Split object
- ◆ Plumbing
 - Wired world
 - Wireless world
- ◆ ns scaling

Abstract the Real World

- ◆ Packet headers
- ◆ Mobile node
- ◆ Wireless channel
- ◆ Forwarding and routing
- ◆ Visualization


Wireless Packet Format

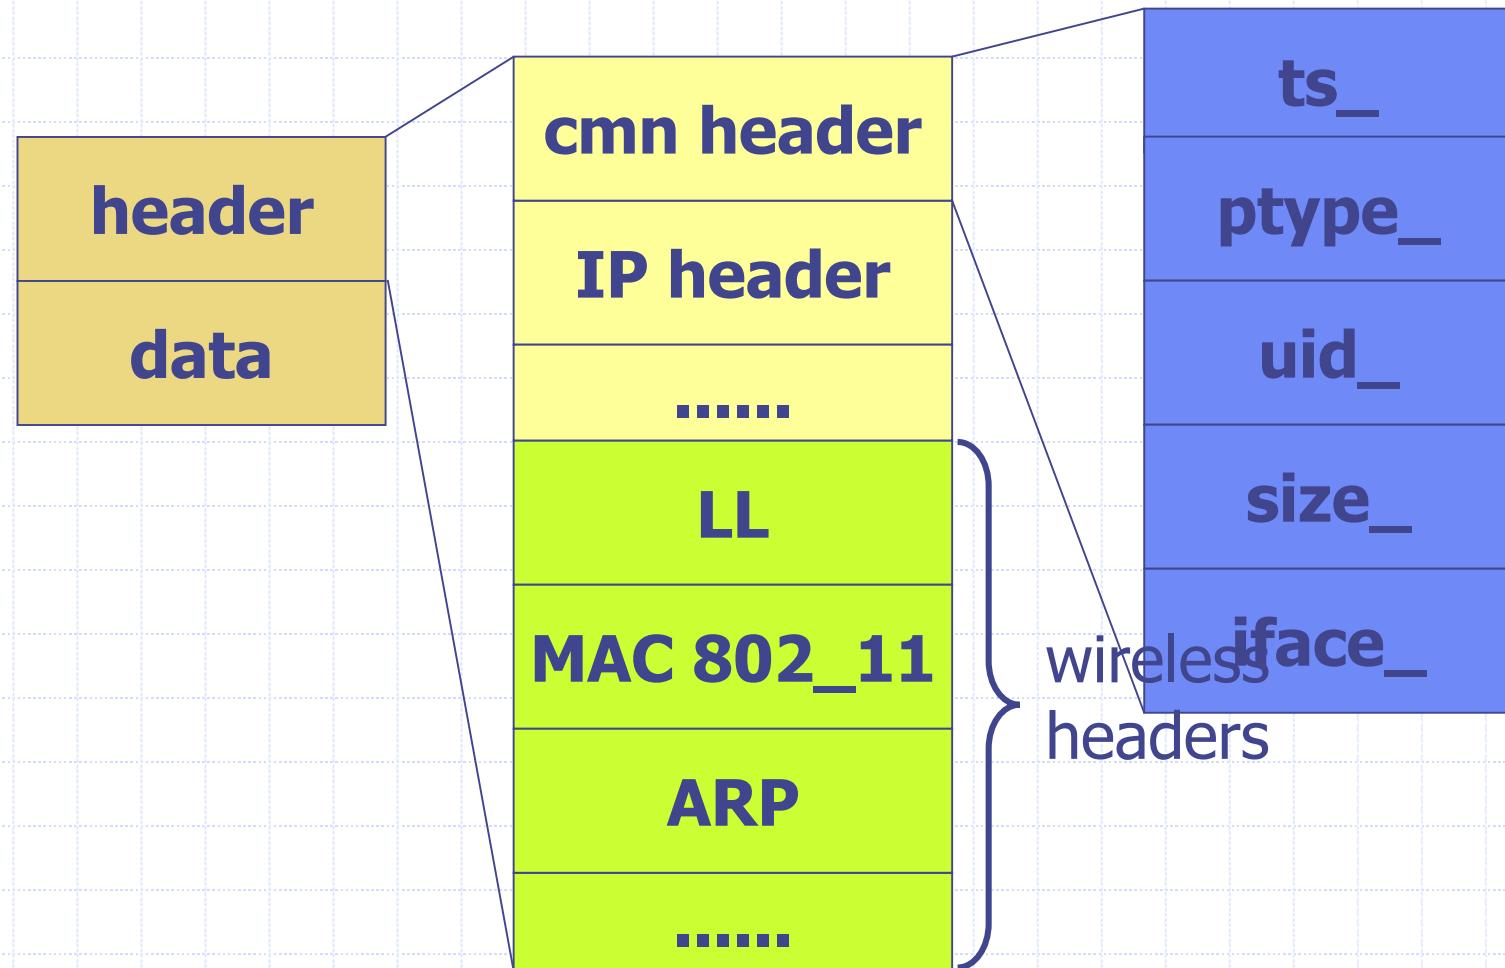


Mobile Node Abstraction

- ◆ Location
 - Coordinates (x,y,z)
- ◆ Movement
 - Speed, direction, starting/ending location, time ...

Portrait of A Mobile Node

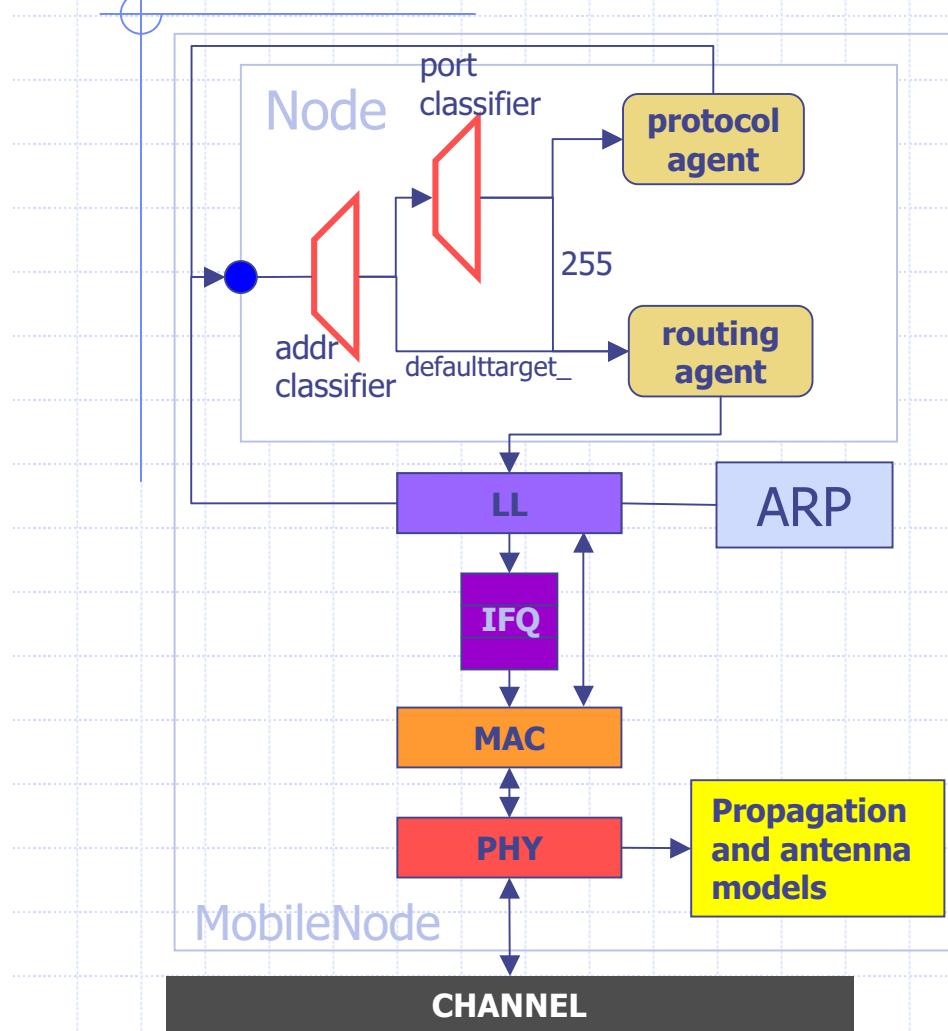


Classifier: Forwarding



Agent: Protocol Entity



Node Entry



LL: Link layer object



IFQ: Interface queue



MAC: Mac object



PHY: Net interface



Mobile Node: Components

- ◆ Link Layer

- Same as LAN, but with a separate ARP module

- ◆ Interface queue

- Give priority to routing protocol packets

- ◆ Mac Layer

- IEEE 802.11
 - RTS/CTS/DATA/ACK for all unicast packets
 - DATA for all broadcast packets


Mobile Node: Components

- ◆ Network interface (PHY)
 - Parameters based on Direct Sequence Spread Spectrum (WaveLan)
 - Interface with: antenna and propagation models
 - Update energy: transmission and reception
- ◆ Radio Propagation Model
 - Friis-space attenuation($1/r^2$) at near distance
 - Two-ray Ground ($1/r^4$) at far distance
- ◆ Antenna
 - Omni-directional, unity-gain

Wireless Channel

- ◆ Duplicate packets to all mobile nodes attached to the channel except the sender
- ◆ It is the receiver's responsibility to decide if it will accept the packet
 - Collision is handled at individual receiver
 - $O(N^2)$ messages → grid keeper

Grid-keeper: An Optimization

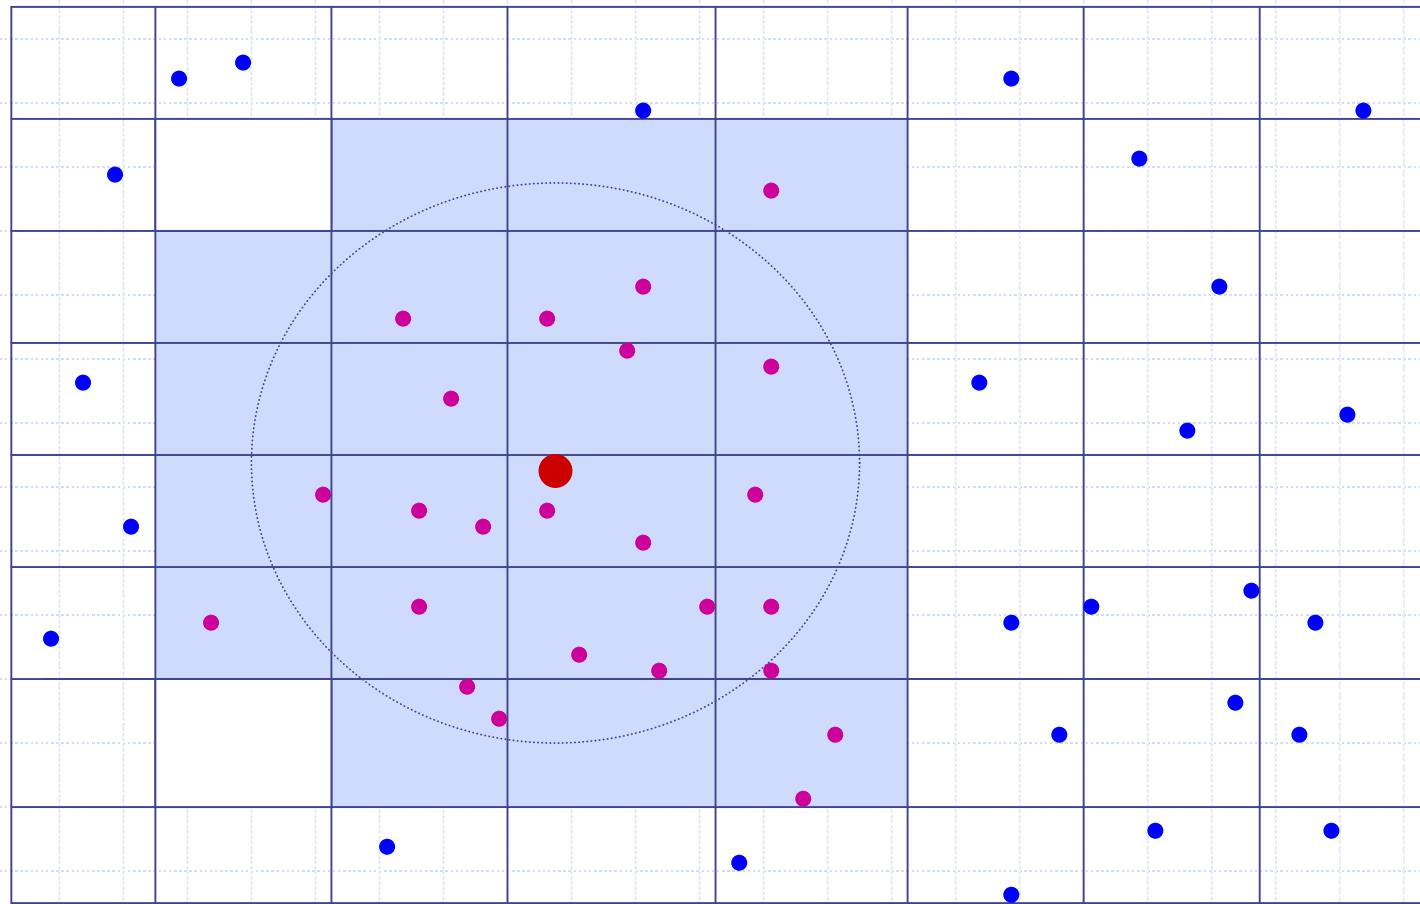

Outline

- ◆ Fundamental concept
 - Split object
- ◆ Plumbing
 - Wired world
 - Wireless world
- ◆ ns scaling

ns Scaling


- ◆ Limitations to simulation size

- Memory
 - Run time


- ◆ Solutions

- Abstraction
 - Fine-tuning (next session)

Memory Footprint of ns

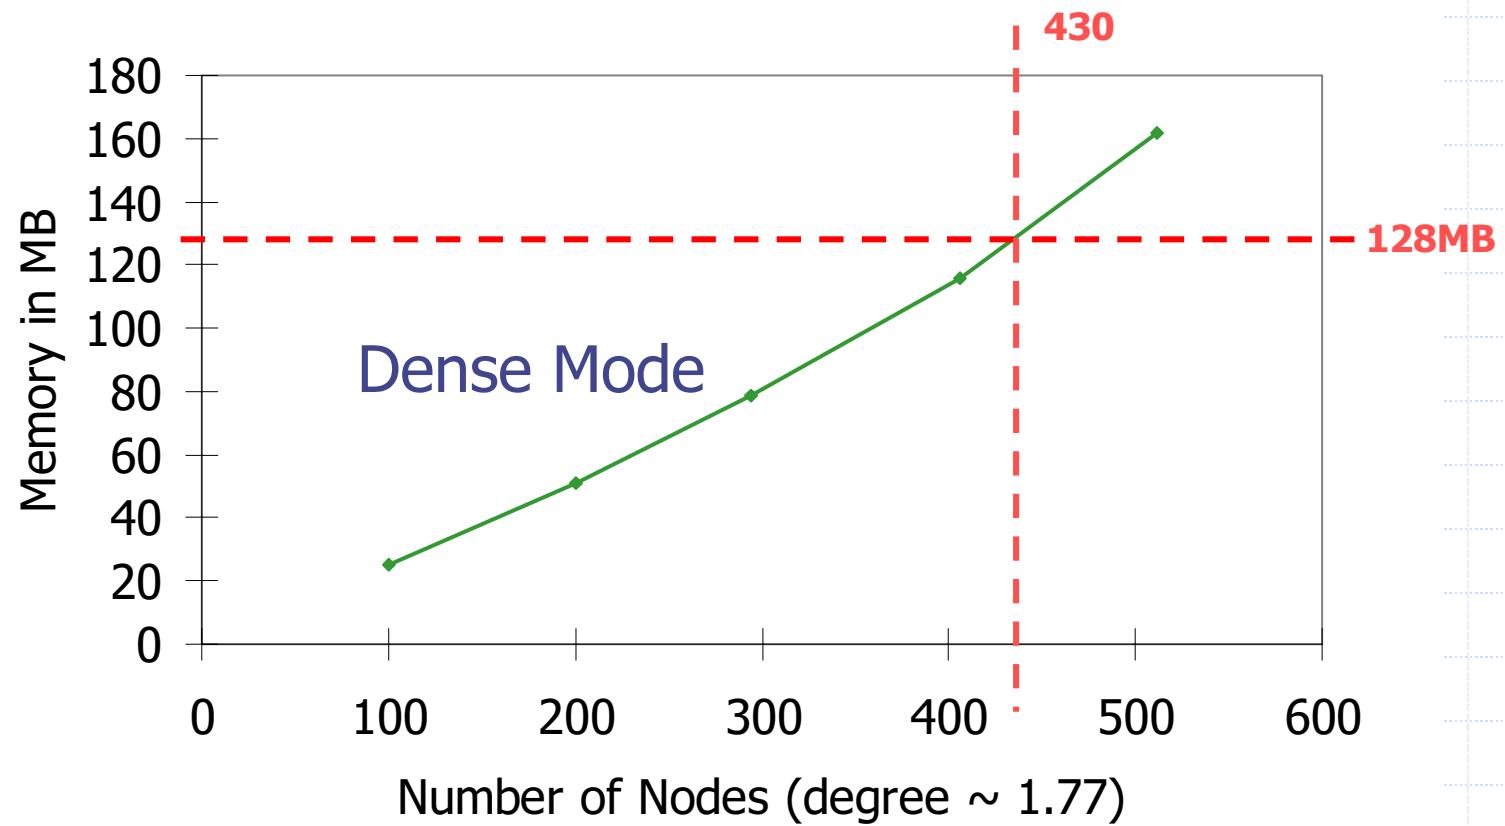

Run Time of ns

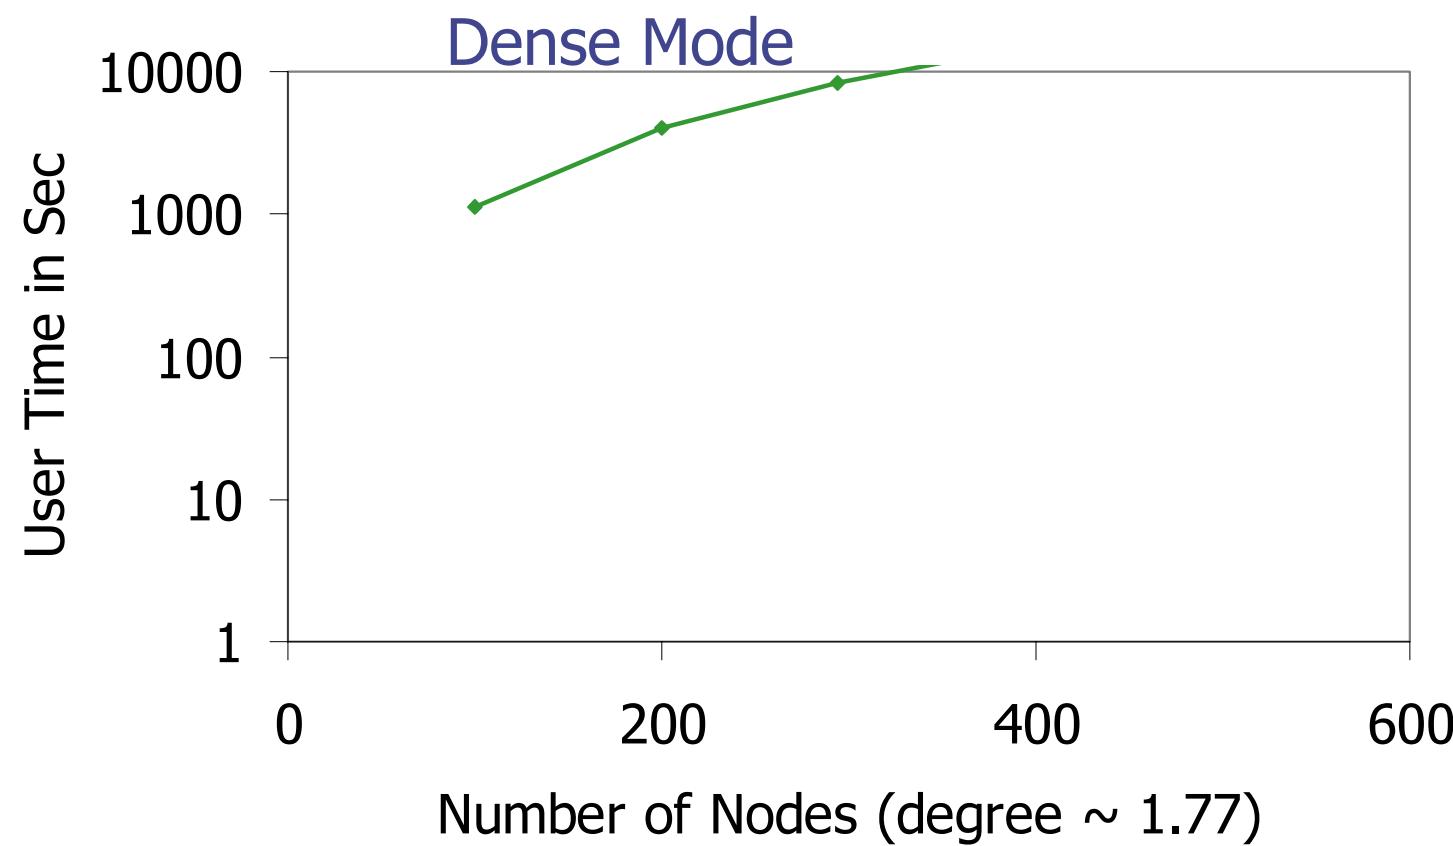


Culprit: Details, Details

- ◆ Dense mode tries to capture packet-level behavior
 - Prunes, Joins, ...
- ◆ Let's abstract it out
 - Centralized multicast
 - SessionSim


Centralized Multicast

Dense Mode Multicast

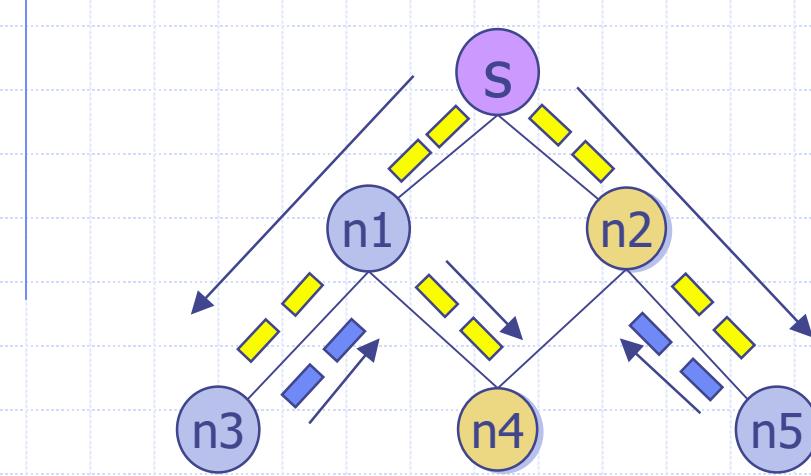

- source
- receiver
- data
- prune

Route
Computation
Unit

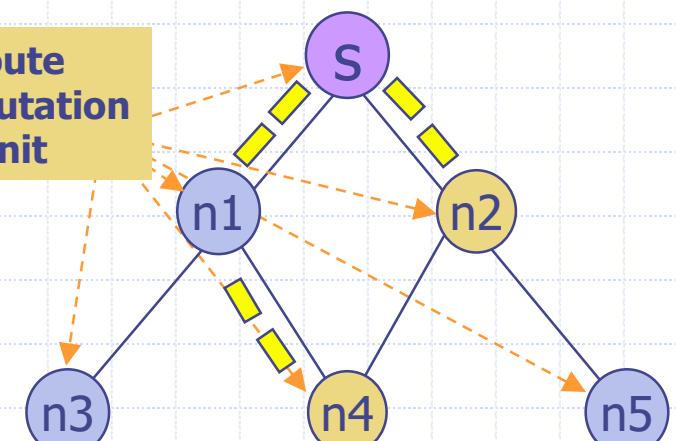

Centralized Multicast

Centralized Multicast

- ◆ Usage

```
$ns mrtproto CtrMcast
```

- ◆ Limitation

- No exact dynamic behavior, e.g., routing convergence time
- Does not mean to replace DM

Further Abstraction


ns Object Sizes

Multicast Node	6KB
Duplex link	14KB

- ◆ Remove all intermediate nodes and links
- ◆ Do not model:
 - Detailed queueing
 - Detailed packet delivery

SessionSim

Detailed Packet Distribution

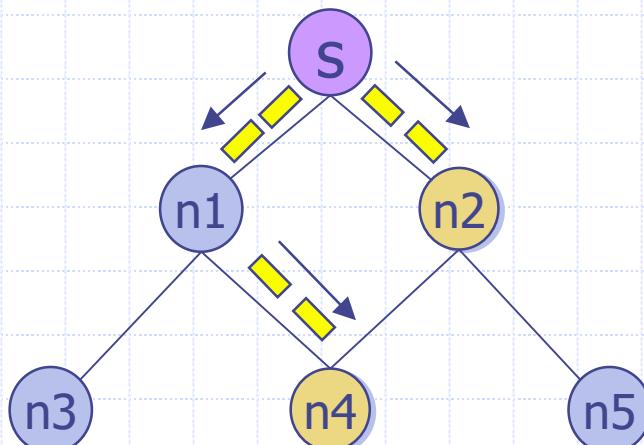


source



receiver



data

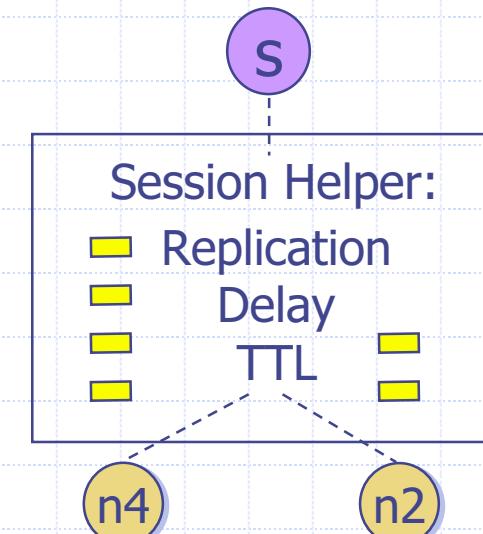

Session Multicast

SessionSim

◆ Usage

```
set ns [new SessionSim]
```


instead of

```
set ns [new Simulator]
```


◆ Limitation

- Distorted end-to-end delay
- Packet loss due to congestion


Memory Footprint of ns

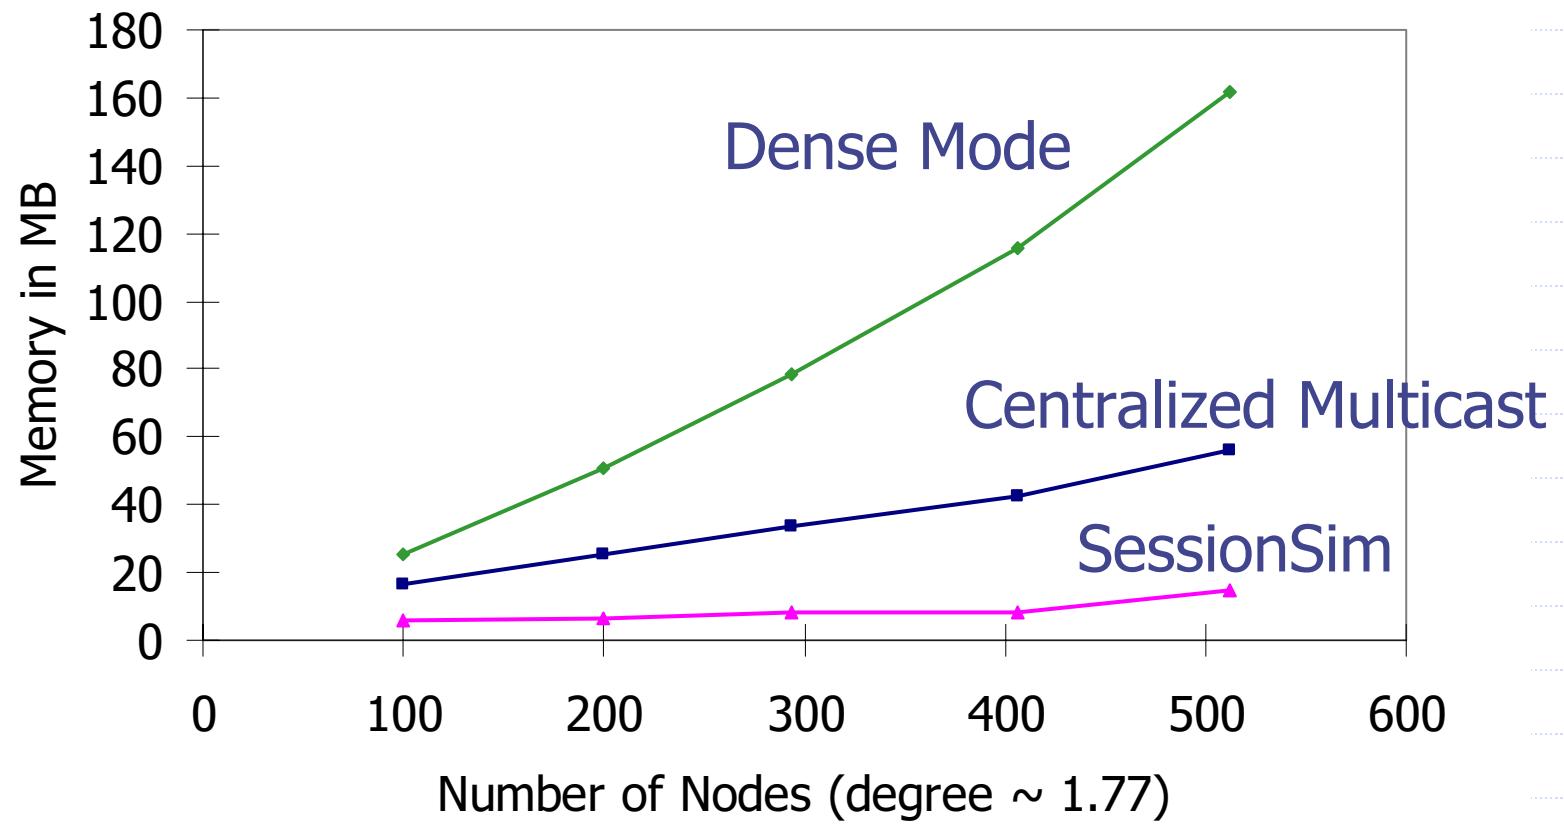

Run Time of ns

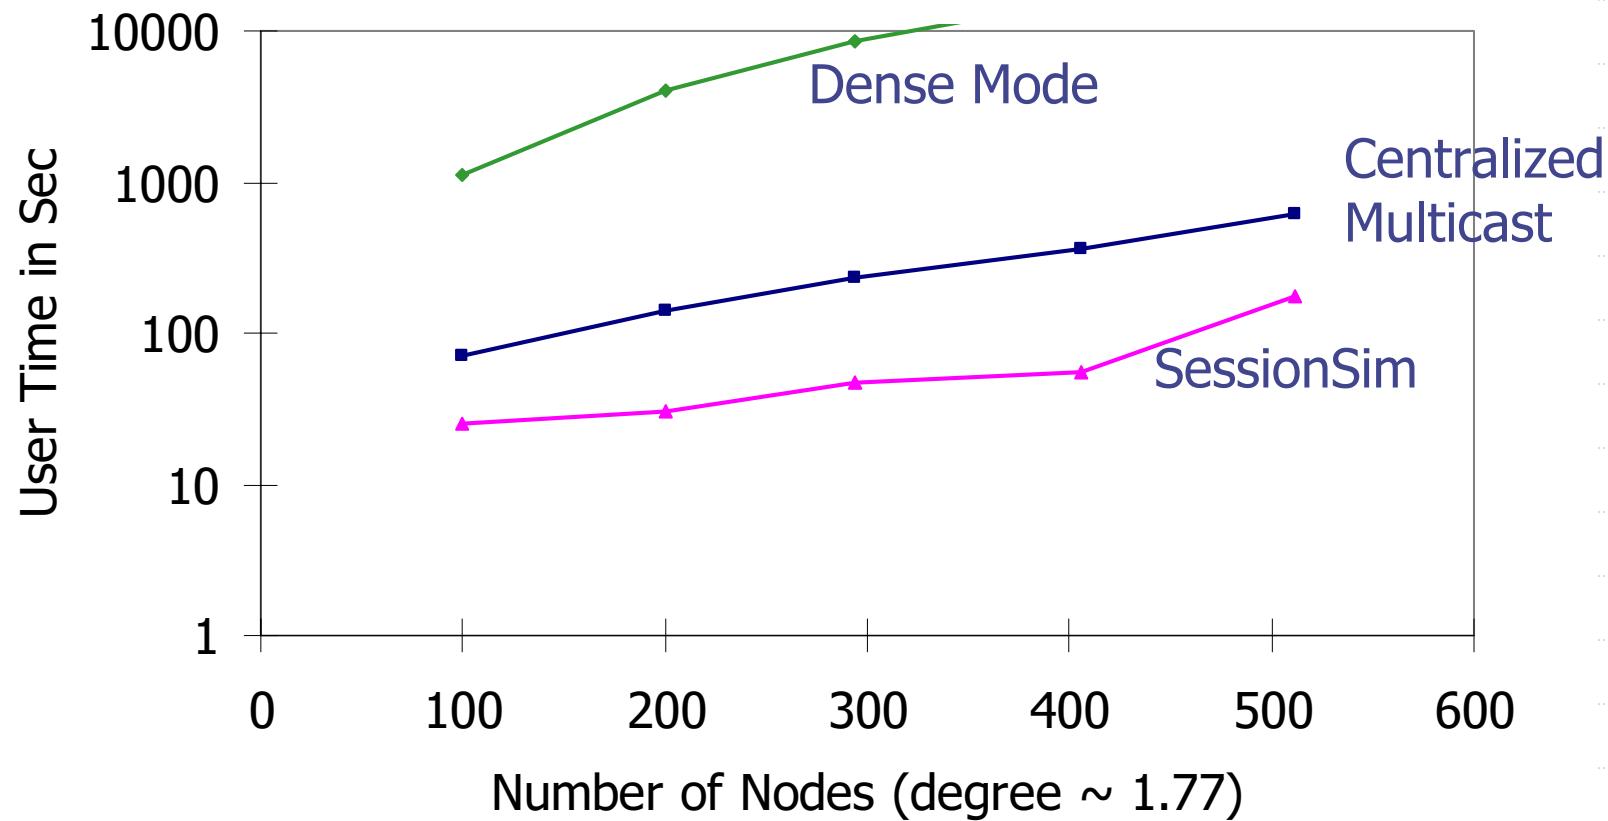


Distortion of Centralized Multicast

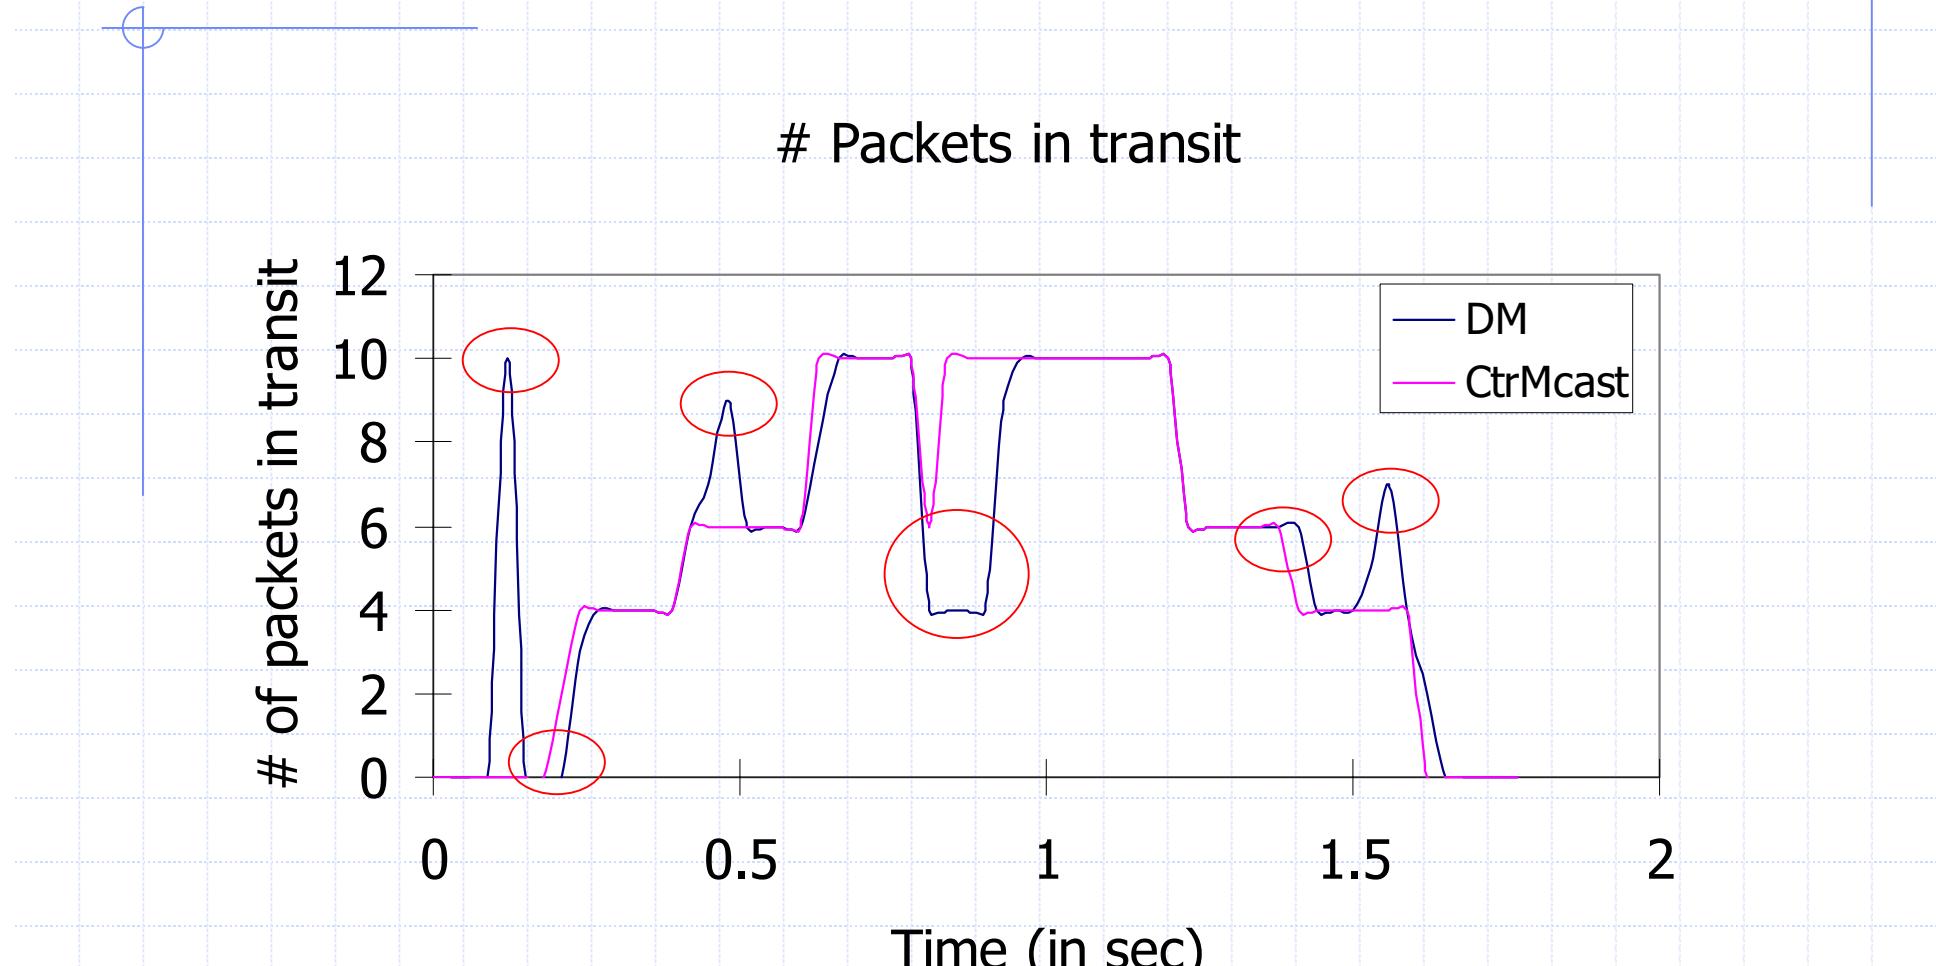

Distortion of SessionSim

Mean (Diff in E-E Delay)

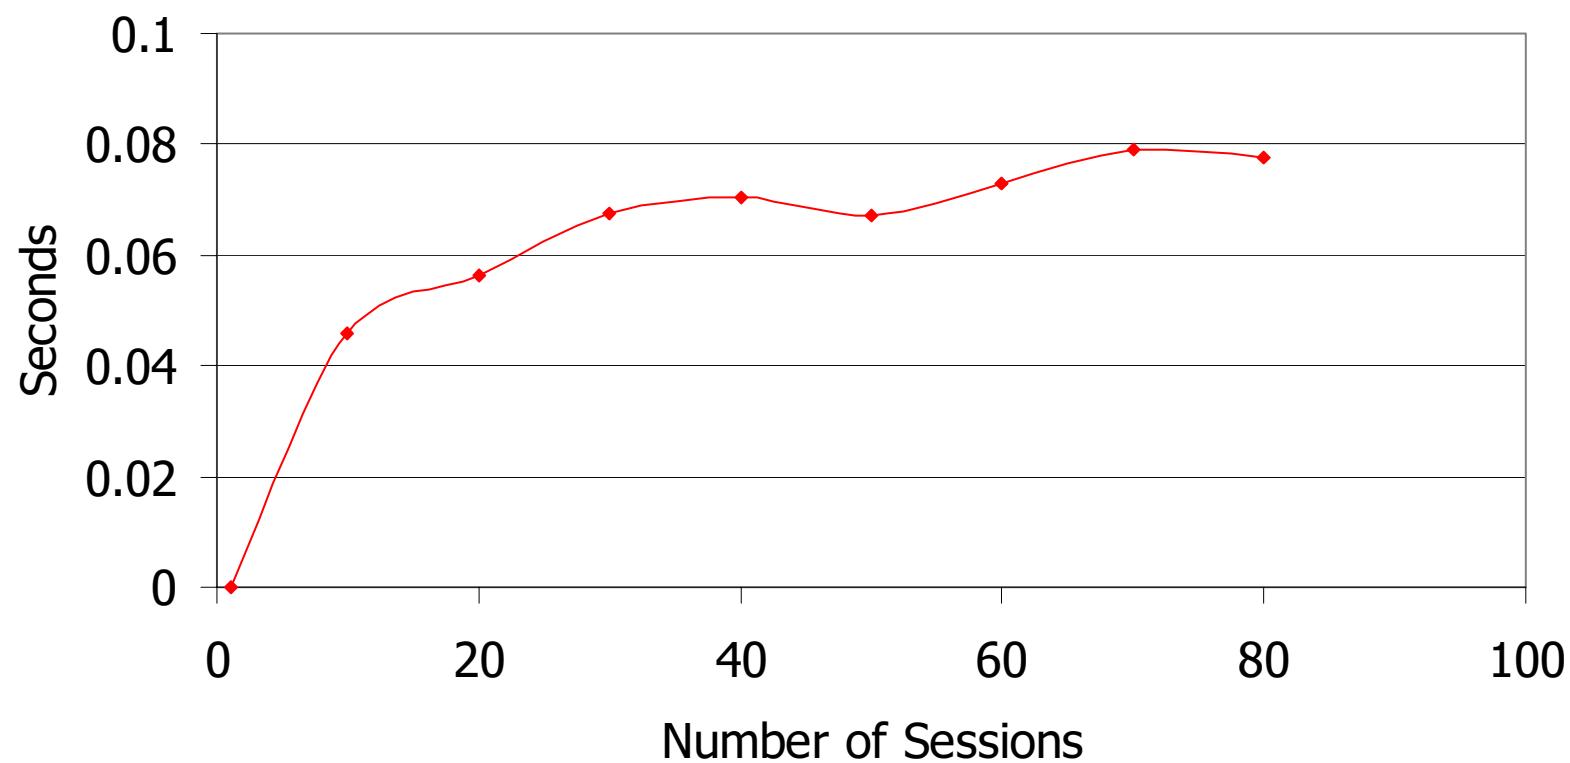

Footnotes

- ◆ My sim still uses too much memory?
Or
- ◆ I want large detailed simulation, e.g.,
Web traffic pattern?

- ◆ Fine-tune your simulator
 - We'll cover it this afternoon